



RADIO TEST REPORT

Report Number.....: **ZKT-2608251577E-3**

Date of Test.....: Aug. 25, 2026 to Sep. 01, 2026

Date of issue.....: Sep. 01, 2026

Total number of pages.....: 49

Test Result: PASS

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: **Mid Ocean Brands B.V.**

Address: Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.

Manufacturer's name: **117486**

Address: N/A

Test specification:

Standard.....: ETSI EN 300 328 V2.2.2 (2019-07)

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No......: TRF-EL-121_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: **Wireless Speaker**

Trademark: N/A

Model/Type reference.....: MO2378

Ratings.....: Input: 5V --- 3A, 9V --- 3A

Output: DC5V---1A, 7.5V---1A, 9V---1.1A, 12V---1.25A

Battery: 3.7V, 1200mAh, 4.44Wh



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.
Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Jackson Fang

Approved (name + signature).....: Lake Xie





TABLE OF CONTENT

	PAGE
1. VERSION	5
2.TEST SUMMARY	6
3.MEASUREMENT UNCERTAINTY	7
3.1 TEST FACILITY	7
3.2 MEASUREMENT UNCERTAINTY	7
4.GENERAL INFORMATION	8
4.1 GENERAL DESCRIPTION OF EUT	8
4.2 TEST SETUP CONFIGURATION	8
4.3 SUPPORT EQUIPMENT	8
4.4 TEST MODE	9
4.5 TEST ENVIRONMENT	9
4.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
5.INFORMATION AS REQUIRED	11
6. RF OUTPUT POWER	15
6.1 BLOCK DIAGRAM OF TEST SETUP	15
6.2 LIMIT	15
6.3 TEST PROCEDURE	15
6.4 TEST RESULT	16
7.ACCUMULATED TRANSMIT TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE	17
7.1 BLOCK DIAGRAM OF TEST SETUP	17
7.2 LIMIT	17
7.3 TEST PROCEDURE	17
7.4 TEST RESULT	20
8.HOPPING FREQUENCY SEPARATION	21
8.1 BLOCK DIAGRAM OF TEST SETUP	21
8.2 LIMIT	21
8.3 TEST PROCEDURE	21
8.4 TEST RESULT	23
9.ADAPTIVITY (ADAPTIVE FREQUENCY HOPPING)	24
9.1 LIMIT	24
9.2 TEST CONDITIONS	25



9.3	TEST PROCEDURE	25
9.4	TEST RESULT	25
10.	OCCUPIED CHANNEL BANDWIDTH	26
10.1	BLOCK DIAGRAM OF TEST SETUP	26
10.2	LIMIT	26
10.3	TEST PROCEDURE	26
10.4	TEST RESULT	27
11.	TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	28
11.1	BLOCK DIAGRAM OF TEST SETUP	28
11.2	LIMIT	28
11.3	TEST PROCEDURE	28
11.4	TEST RESULT	31
12.	TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	32
12.1	BLOCK DIAGRAM OF TEST SETUP	32
12.2	LIMITS	33
12.3	TEST PROCEDURE	33
12.4	TEST RESULTS	35
13.	RECEIVER SPURIOUS EMISSIONS	36
13.1	BLOCK DIAGRAM OF TEST SETUP	36
13.2	LIMITS	37
13.3	TEST PROCEDURE	37
13.4	TEST RESULTS	38
14.	RECEIVER BLOCKING	39
14.1	BLOCK DIAGRAM OF TEST SETUP	39
14.2	LIMIT	39
14.3	TEST PROCEDURE	40
14.4	TEST RESULT	41
15.	EUT TEST SETUP PHOTOGRAPHS	42
16.	EUT PHOTOGRAPHS	43



1. VERSION

Report No.	Issue Date	Description	Approved
ZKT-2608251577E-3	Sep. 01, 2026	Original	Valid



2.TEST SUMMARY

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
Transmitter Parameters			
1	RF output power	4.3.1.2	PASS
2	Duty Cycle, Tx-sequence, Tx-gap	4.3.1.3	N/A
3	Accumulated Transmit Time, Frequency Occupation and Hopping Sequence	4.3.1.4	PASS
4	Hopping Frequency Separation	4.3.1.5	PASS
5	Medium Utilization (MU) factor	4.3.1.6	N/A
6	Adaptivity (Adaptive Frequency Hopping)	4.3.1.7	N/A
7	Occupied Channel Bandwidth	4.3.1.8	PASS
8	Transmitter unwanted emissions in the out-of-band domain	4.3.1.9	PASS
9	Transmitter unwanted emissions in the spurious domain	4.3.1.10	PASS
Receiver Parameters			
10	Receiver spurious emissions	4.3.1.11	PASS
11	Receiver Blocking	4.3.1.12	PASS
12	Geo-location Capability	4.3.1.13	N/A
Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.			

Remark:

N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.



3.MEASUREMENT UNCERTAINTY

3.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add.: ZKT Building & 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 927491

Designation Number: CN1431

IC Registered No.: 27033

CAB identifier: CN0110

Designation Number: CN0110

3.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



4.GENERAL INFORMATION

4.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless Speaker
Trademark:	N/A
Model No.:	MO2378
Serial Models:	N/A
Model Difference:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Channel Number:	79 channels
Channel Spacing:	1MHz
Operation Frequency:	2402-2480MHz
Max. RF Output Power:	2.34dBm
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna installation:	PCB antenna
Antenna Gain :	0dBi Note: the antenna gain is provided by the customer, and the final test result has nothing to do with us.
Power Supply:	Input: 5V --- 3A, 9V --- 3A Output: DC5V---1A, 7.5V---1A, 9V---1.1A, 12V---1.25A
Battery Capacity:	3.7V, 1200mAh, 4.44Wh (Only supports playing music)

4.2 TEST SETUP CONFIGURATION

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	---	---	---	---	---	--

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



4.4 TEST MODE

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ -DQPSK, 8-DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ -DQPSK, 8-DPSK)	2402MHz	2441MHz	2480MHz

4.5 TEST ENVIRONMENT

Normal power source and temperature and humidity:

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage.

- Mains voltage 3.7Vdc

The normal temperature and humidity conditions for tests shall be any convenient combination of temperature and humidity within the following ranges:

- temperature +15 °C to +35 °C; For test temperature 25 °C.
- relative humidity 20 % to 75 %; For test relative humidity 60 %.

Extreme Test Conditions:

For tests at extreme temperatures, measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

For tests at extreme voltages, measurements shall be made over the extremes of the power source voltage range as declared by the manufacturer.

Test Conditions	LTLV	LTHV	HTHV	HTLV
Temperature (°C)	-10	-10	40	40
Test Voltage (DC)	3.3	4.2	4.2	3.3



4.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Oct. 24, 2025	Oct. 23, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 20, 2025	Sep. 19, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 20, 2025	Sep. 19, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2025	Sep. 29, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Sep. 20, 2025	Sep. 19, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 25, 2025	Sep. 24, 2026
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Dec. 18, 2025	Dec. 17, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 28, 2025	Sep. 27, 2026
11	Test Cable	N/A	R-01	N/A	N/A	May. 25, 2026	May. 24, 2027
12	Test Cable	N/A	R-02	N/A	N/A	May. 25, 2026	May. 24, 2027
13	Test Cable	N/A	R-03	N/A	N/A	May. 25, 2026	May. 24, 2027
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	Test Cable	N/A	RF-01	N/A	N/A	May. 25, 2026	May. 24, 2027
4	Test Cable	N/A	RF-02	N/A	N/A	May. 25, 2026	May. 24, 2027
5	Test Cable	N/A	RF-03	N/A	N/A	May. 25, 2026	May. 24, 2027
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 19, 2025	Sep. 18, 2026
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 20, 2025	Sep. 19, 2026
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Sep. 25, 2025	Sep. 24, 2026
9	SHIELD BOX	TESCOM	TC-5970C	5970C015553	N/A	Dec. 18, 2025	Dec. 17, 2026
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 28, 2025	Sep. 27, 2026
11	MWRF Power Meter Test system	MW	MW100-RF CB	10371	N/A	Sep. 19, 2025	Sep. 18, 2026
12	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 20, 2025	Sep. 19, 2026
13	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



5. INFORMATION AS REQUIRED

ETSI EN 300 328 Annex E

a) The type of modulation used by the equipment:
☒ FHSS
☐ other forms of modulation
b) In case of FHSS modulation:
☐ In case of non-Adaptive Frequency Hopping equipment:
The number of Hopping Frequencies: _
☒ In case of Adaptive Frequency Hopping Equipment:
The maximum number of Hopping Frequencies: <u>79</u>
The minimum number of Hopping Frequencies: <u>79</u>
☒ The (average) Dwell Time:
c) Adaptive / non-adaptive equipment:
☐ non-adaptive Equipment
☒ adaptive Equipment without the possibility to switch to a non-adaptive mode
☐ adaptive Equipment which can also operate in a non-adaptive mode
d) In case of adaptive equipment:
The Channel Occupancy Time implemented by the equipment:
☒ The equipment has implemented an LBT based DAA mechanism
The CCA time implemented by the equipment: μ s
☐ The equipment has implemented an non-LBT based DAA mechanism
☐ The equipment can operate in more than one adaptive mode
e) In case of non-adaptive Equipment:
The maximum RF Output Power (e.i.r.p.): dbm
The maximum (corresponding) Duty Cycle:
Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):
f) The worst case operational mode for each of the following tests:
☒ RF Output Power: GFSK, $\pi/4$ -DQPSK, 8-DPSK
☐ Power Spectral Density:
☐ Duty cycle, Tx-Sequence, Tx-gap:
☒ Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment): GFSK
☒ Hopping Frequency Separation (only for FHSS equipment): GFSK
☐ Medium Utilization:
☐ Adaptivity:
☒ Nominal Channel Bandwidth: GFSK
☒ Transmitter unwanted emissions in the OOB domain: GFSK
☒ Transmitter unwanted emissions in the spurious domain: GFSK
☒ Receiver spurious emissions : GFSK
☒ Receiver blocking : GFSK
g) The different transmit operating modes (tick all that apply):
☒ Operating mode 1: Single Antenna Equipment
☐ Equipment with only one antenna
☐ Equipment with two diversity antennas but only one antenna active at any moment in time
☒ Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only One antenna is used (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2
NOTE 1: Add more lines if more channel bandwidths are supported.
☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1



☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2																				
NOTE 2: Add more lines if more channel bandwidths are supported.																				
h) In case of Smart Antenna Systems:																				
The number of Receive chains:																				
The number of Transmit chains:																				
☐ symmetrical power distribution																				
☐ asymmetrical power distribution																				
In case of beam forming, the maximum (additional) beam forming gain:																				
NOTE: The additional beam forming gain does not include the basic gain of a single antenna.																				
i) Operating Frequency Range(s) of the equipment:																				
Operating Frequency Range 1: Refer to section 4.1																				
Operating Frequency Range 2: _																				
NOTE: Add more lines if more Frequency Ranges are supported.																				
j) Nominal Channel Bandwidth(s):																				
Nominal Channel Bandwidth 1:																				
NOTE: Add more lines if more channel bandwidths are supported.																				
k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):																				
☒ Stand-alone																				
☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)																				
☐ Plug-in radio device (Equipment intended for a variety of host systems)																				
☐ Other																				
l) The normal and the extreme operating conditions that apply to the equipment:																				
Refer to section 4.6																				
m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p. levels:																				
Antenna Type:																				
☒ Chip antennas (information to be provided in case of conducted measurements)																				
Antenna Gain: Refer to section 4.1																				
If applicable, additional beamforming gain (excluding basic antenna gain):																				
☐ Temporary RF connector provided																				
☐ No temporary RF connector provided																				
☐ Dedicated Antennas (equipment with antenna connector)																				
☐ Single power level with corresponding antenna(s)																				
☐ Multiple power settings and corresponding antenna(s)																				
Number of different Power Levels:																				
Power Level 1:																				
Power Level 2:																				
Power Level 3:																				
NOTE 1: Add more lines in case the equipment has more power levels.																				
NOTE 2: These power levels are conducted power levels (at antenna connector).																				
For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable																				
Power Level 1:																				
Number of antenna assemblies provided for this power level:																				
<table border="1"><thead><tr><th>Assembly #</th><th>Gain (dBi)</th><th>e.i.r.p.(dBm)</th><th>Part number or model name</th></tr></thead><tbody><tr><td>1</td><td></td><td></td><td></td></tr><tr><td>2</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td></tr></tbody></table>	Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name	1				2				3				4			
Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name																	
1																				
2																				
3																				
4																				
NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.																				
Power Level 2:																				
Number of antenna assemblies provided for this power level:																				



Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3:

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Refer to section 8.

o) Describe the test modes available which can facilitate testing:

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], IEEE 802.15.4™ [i.4], proprietary, etc.):.....

q) If applicable, the statistical analysis referred to in clause 5.4.1 q)
(to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r)
(to be provided as separate attachment)

s) Geo-location capability supported by the equipment:

☐ Yes

☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user

☒ No


t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):

.....



6. RF OUTPUT POWER

6.1 BLOCK DIAGRAM OF TEST SETUP

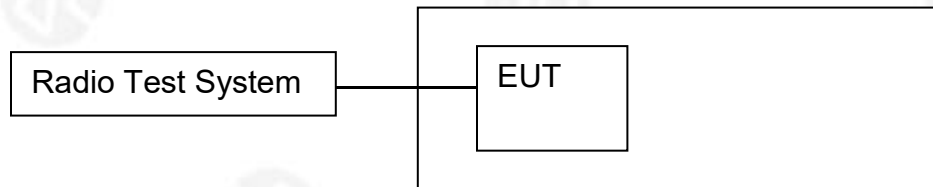

6.2 LIMIT

For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.3.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

Limit
20dBm

6.3 TEST PROCEDURE

Step 1:

- Use a fast power sensor suitable for 2.4 GHz and capable of minimum 1 MS/s.
 - Use the following settings:
 - Sample speed 1 MS/s or faster.
 - The samples shall represent the RMS power of the signal.
 - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.
- NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

Step 2:

- For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
 - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
 - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
 - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps.

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.
- The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.
- NOTE 2: In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.



Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 5:

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.
 - If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below:

$$P = A + G + Y$$

- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.


6.4 TEST RESULT

Modulation	Test conditions	Packet	Frequency (MHz)	Meas Duty Cycle (%)	Power (dBm)	
					Measured Conducted	EIRP
GFSK	NVNT	1-DH5	Hopping	77.79	2.34	2.34
	LVNT		Hopping	77.89	1.75	1.75
	HVNT		Hopping	77.42	1.94	1.94
$\pi/4$ -DQPSK	NVNT	2-DH5	Hopping	77.87	1.54	1.54
	LVNT		Hopping	77.79	1.56	1.56
	HVNT		Hopping	77.53	1.52	1.52
8-DPSK	NVNT	3-DH5	Hopping	77.89	1.02	1.02
	LVNT		Hopping	77.75	1.15	1.15
	HVNT		Hopping	77.86	1.18	1.18
Limit					≤100mW (20dBm)	
Remark: EIRP = A + G + Y, G = 0dBi.						



7.ACCUMULATED TRANSMIT TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE

7.1 BLOCK DIAGRAM OF TEST SETUP

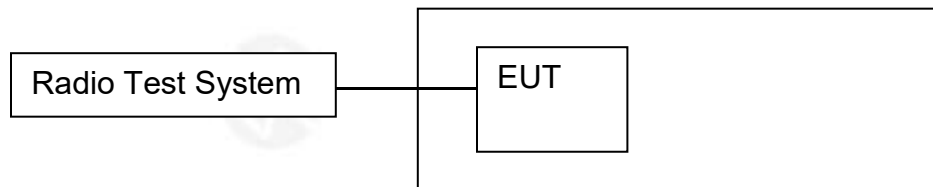

7.2 LIMIT

Adaptive FHSS equipment shall be capable of operating over a minimum of 70 % of the band specified in table 1.

Table 1: Service frequency bands

	Service frequency bands
Transmit	2 400 MHz to 2 483,5 MHz
Receive	2 400 MHz to 2 483,5 MHz

The Accumulated Transmit Time on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used. In order for the equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:

Option 1: Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.

Option 2: The occupation probability for each frequency shall be between $((1 / U) \times 25 \%)$ and 77 % where U is the number of hopping frequencies in use.

The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

7.3 TEST PROCEDURE

Step 1:

- The output of the transmitter shall be connected to a spectrum analyzer or equivalent.
- The analyzer shall be set as follows:
 - Centre Frequency: Equal to the hopping frequency being investigated
 - Frequency Span: 0 Hz
 - RBW: ~ 50 % of the Occupied Channel Bandwidth
 - VBW: $\geq$ RBW
 - Detector Mode: RMS
 - Sweep time: Equal to the applicable observation period (see clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2)
 - Number of sweep points: 30 000
 - Trace mode: Clear / Write
 - Trigger: Free Run



Step 2:

- Save the trace data to a file for further analysis by a computing device using an appropriate software application or program.

Step 3:

- Identify the data points related to the frequency being investigated by applying a threshold.

The data points resulting from transmissions on the hopping frequency being investigated are assumed to have much higher levels compared to data points resulting from transmissions on adjacent hopping frequencies. If a clear determination between these transmissions is not possible, the RBW in step 1 shall be further reduced. In addition, a channel filter may be used.

- Count the number of data points identified as resulting from transmissions on the frequency being investigated and multiply this number by the time difference between two consecutive data points.

Step 4:

- The result in step 3 is the Accumulated Transmit Time which shall comply with the limit provided in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 and which shall be recorded in the test report.

Step 5:

NOTE 1: This step is only applicable for equipment implementing Option 1 in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 for complying with the Frequency Occupation requirement and the manufacturer decides to demonstrate compliance with this requirement via measurement.

- Make the following changes on the analyser and repeat step 2 and step 3.

Sweep time: $4 \times \text{Dwell Time} \times \text{Actual number of hopping frequencies in use}$

The hopping frequencies occupied by the equipment without having transmissions during the dwell time (blacklisted frequencies) should be taken into account in the actual number of hopping frequencies in use. If this number cannot be determined (number of blacklisted frequencies unknown) it shall be assumed that the equipment uses the maximum possible number of hopping frequencies.

- The result shall be compared to the limit for the Frequency Occupation defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. The result of this comparison shall be recorded in the test report.

Step 6:

- Make the following changes on the analyzer:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483,5 MHz
- RBW: ~ 50 % of the Occupied Channel Bandwidth (single hopping frequency)
- VBW: $\geq$ RBW
- Detector Mode: RMS
- Sweep time: 1 s
- Trace Mode: Max Hold
- Trigger: Free Run

NOTE 2: The above sweep time setting may result in long measuring times. To avoid such long measuring times, an FFT analyser could be used.



- Wait for the trace to stabilize. Identify the number of hopping frequencies used by the hopping sequence.
- The result shall be compared to the limit (value N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. This value shall be recorded in the test report.

For equipment with blacklisted frequencies, it might not be possible to verify the number of hopping frequencies in use. However they shall comply with the requirement for Accumulated Transmit Time and Frequency Occupation assuming the minimum number of hopping frequencies (N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 is used.

Step 7:

- For adaptive equipment, using the lowest and highest -20 dB points from the total spectrum envelope obtained in step 6, it shall be verified whether the equipment uses 70 % of the band specified in clause 1. The result shall be recorded in the test report.



7.4 TEST RESULT

Dwell Time One Burst

Condition	Packet	Frequency (MHz)	Pulse Time (ms)	Burst Number
NVNT	1-DH5	2441	2.880	102
NVNT	2-DH5	2441	2.917	102
NVNT	3-DH5	2441	2.901	93

Accumulated Transmit Time

Condition	Packet	Frequency (MHz)	Accumulated Transmit Time (ms)	Limit (ms)	Sweep Time (ms)	Result
NVNT	1-DH5	2441	295.119	<400	31600	PASS
NVNT	2-DH5	2441	296.790	<400	31600	PASS
NVNT	3-DH5	2441	269.963	<400	31600	PASS

Minimum Frequency Occupation

Condition	Packet	Frequency (MHz)	Burst Number	Limit	Sweep Time (ms)	Result
NVNT	1-DH5	2441	4	1	910.116	PASS
NVNT	2-DH5	2441	2	1	921.912	PASS
NVNT	3-DH5	2441	2	1	916.676	PASS


Hopping Sequence

Condition	Packet	Hopping Number	Limit	Band Allocation (%)	Limit Band Allocation (%)	Result
NVNT	1-DH5	79	15	94.63	>70	PASS
NVNT	2-DH5	79	15	94.63	>70	PASS
NVNT	3-DH5	79	15	94.68	>70	PASS



8. HOPPING FREQUENCY SEPARATION

8.1 BLOCK DIAGRAM OF TEST SETUP

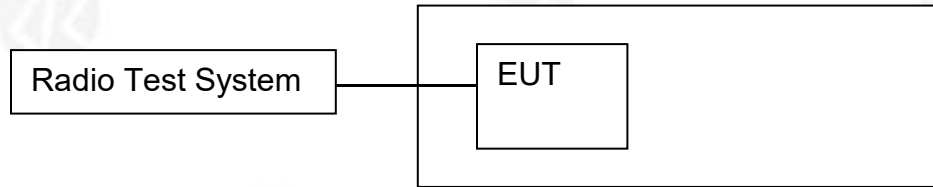

8.2 LIMIT

For Non-adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be equal to Occupied Channel Bandwidth (see clause 5.3.1.5.3) of a single hop, with a minimum separation of 100 kHz.

For Adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be 100 kHz.

8.3 TEST PROCEDURE

The Hopping Frequency Separation as defined in clause 4.3.1.5 shall be measured and recorded using any of the following options. The selected option shall be stated in the test report.

Option 1

Step 1:

- The output of the transmitter shall be connected to a spectrum analyser or equivalent.
- The analyser shall be set as follows:
 - Centre Frequency: Centre of the two adjacent hopping frequencies
 - Frequency Span: Sufficient to see the complete power envelope of both hopping frequencies
 - RBW: 1 % of the span
 - VBW: 3 × RBW
 - Detector Mode: RMS
 - Trace Mode: Max Hold
 - Sweep time: 1 s

Step 2:

- Wait for the trace to stabilize.
- Use the marker function of the analyser to define the frequencies corresponding to the lower -20 dBr point and the upper -20 dBr point for both hopping frequencies F1 and F2. This will result in F1_L and F1_H for hopping frequency F1 and in F2_L and F2_H for hopping frequency F2. These values shall be recorded in the report.

Step 3:

- Calculate the centre frequencies F1_C and F2_C for both hopping frequencies using the formulas below.

These values shall be recorded in the report.

$$F1_C = \frac{F1_L + F1_H}{2} \quad F2_C = \frac{F2_L + F2_H}{2}$$

- Calculate the -20 dBr channel bandwidth (BW_{CHAN}) using the formula below. This value shall be recorded in the report.



$$BW_{\text{CHAN}} = F_{1H} - F_{1L}$$

- Calculate the Hopping Frequency Separation (FHS) using the formula below. This value shall be recorded in the report.

$$F_{\text{HS}} = F_{2C} - F_{1C}$$

- Compare the measured Hopping Frequency Separation with the limit defined in clause 4.3.1.5.3. In addition, for non-Adaptive Frequency Hopping equipment, the Hopping Frequency Separation shall be equal to or greater than Occupied Channel Bandwidth as defined in clause 4.3.1.8 or:

$$F_{\text{HS}} \geq \text{Occupied Channel Bandwidth}$$

- See figure 4:

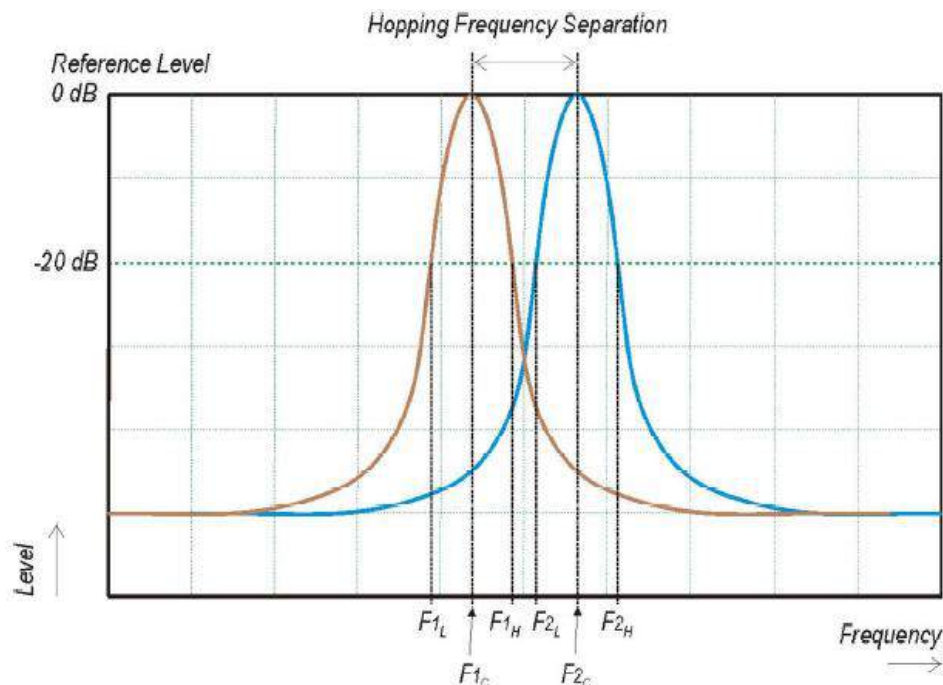


Figure 4: Hopping Frequency Separation

For adaptive equipment, in case of overlapping channels which will prevent the definition of the -20 dB reference points F_{1H} and F_{2L} , a higher reference level (e.g. -10 dB or -6 dB) may be chosen to define the reference points F_{1L} ; F_{1H} ; F_{2L} and F_{2H} .

Alternatively, special test software may be used to:

- force the UUT to hop or transmit on a single Hopping Frequency by which the -20 dB reference points can be measured separately for the two adjacent Hopping Frequencies; and/or
- force the UUT to operate without modulation by which the centre frequencies F_{1C} and F_{2C} can be measured directly.

The method used to measure the Hopping Frequency Separation shall be documented in the test report.



8.4 TEST RESULT

Condition	Packet	Frequency (MHz)	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Result
NVNT	1-DH5	2402	2401.989	2402.988	0.999	0.1	PASS
NVNT	1-DH5	2441	2440.973	2441.999	1.026	0.1	PASS
NVNT	1-DH5	2480	2480.000	2480.973	0.973	0.1	PASS
NVNT	2-DH5	2402	2401.992	2402.967	0.975	0.1	PASS
NVNT	2-DH5	2441	2440.972	2441.981	1.010	0.1	PASS
NVNT	2-DH5	2480	2479.980	2480.971	0.991	0.1	PASS
NVNT	3-DH5	2402	2401.977	2402.973	0.996	0.1	PASS
NVNT	3-DH5	2441	2440.979	2441.968	0.989	0.1	PASS
NVNT	3-DH5	2480	2479.988	2480.986	0.998	0.1	PASS



9.ADAPTIVITY (ADAPTIVE FREQUENCY HOPPING)

9.1 LIMIT

Adaptive Frequency Hopping using other forms of FHSS using LBT

Adaptive FHSS equipment using LBT shall comply with the following minimum set of requirements:

1) At the start of every dwell time, before transmission on a hopping frequency, the equipment shall perform a Clear Channel Assessment (CCA) check using energy detect. The CCA observation time shall be not less than 0,2 % of the Channel Occupancy Time with a minimum of 18 μ s. If the equipment finds the hopping frequency to be clear, it may transmit immediately.

2) If it is determined that a signal is present with a level above the detection threshold defined in step 5 the hopping frequency shall be marked as 'unavailable'. Then the equipment may jump to the next frequency in the hopping scheme even before the end of the dwell time, but in that case the 'unavailable' channel cannot be considered as being 'occupied' and shall be disregarded with respect to the requirement of the minimum number of hopping frequencies as defined in clause 4.3.1.4.3.2. Alternatively, the equipment can remain on the frequency during the remainder of the dwell time. However, if the equipment remains on the frequency with the intention to transmit, it shall perform an Extended CCA check in which the (unavailable) channel is observed for a random duration between the value defined for the CCA observation time in step 1 and 5 % of the Channel Occupancy Time defined in step 3. If the Extended CCA check has determined the frequency to be no longer occupied, the hopping frequency becomes available again. If the Extended CCA time has determined the channel still to be occupied, it shall perform new Extended CCA checks until the channel is no longer occupied.

3) The total time during which an equipment has transmissions on a given hopping frequency without re evaluating the availability of that frequency is defined as the Channel Occupancy Time. The Channel Occupancy Time for a given hopping frequency, which starts immediately after a successful CCA, shall be less than 60 ms followed by an Idle Period of minimum 5 % of the Channel Occupancy Time with a minimum of 100 μ s. After the Idle Period has expired, the procedure as in step 1 shall be repeated before having new transmissions on this hopping frequency during the same dwell time. EXAMPLE: An equipment with a dwell time of 400 ms can have 6 transmission sequences of 60 ms each, separated with an Idle Period of 3 ms. Each transmission sequence was preceded with a successful CCA check of 120 μ s.

For LBT based adaptive FHSS equipment with a dwell time < 60 ms, the maximum Channel Occupancy Time is limited by the dwell time.

4) 'Unavailable' channels may be removed from or may remain in the Hopping Sequence, but in any case:

- apart from Short Control Signalling Transmissions referred to in clause 4.3.1.7.4, there shall be no transmissions on 'unavailable' channels;

- a minimum of N hopping frequencies as defined in clause 4.3.1.4.3.2 shall always be maintained.

5) The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to:

$$TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out}) \text{ (Pout in mW e.i.r.p.)}$$

6) The equipment shall comply with the requirements defined in step 1 to step 4 of the present clause in the presence of an unwanted CW signal as defined in table 2.

Table 2: Unwanted Signal parameters

Wanted signal mean power from companion device	Unwanted CW signal frequency (MHz)	Unwanted CW signal power (dBm)
sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 3)
NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.		
NOTE 2: A typical conducted value which can be used in most cases is -50 dBm/MHz.		
NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna.		


Note 2: The UUT is assumed to stop transmissions within a period equal to the maximum Channel Occupancy Time.



9.2 TEST CONDITIONS

See ETSI EN 300 328 V2.2.2 Clause 5.4.6.1.

9.3 TEST PROCEDURE

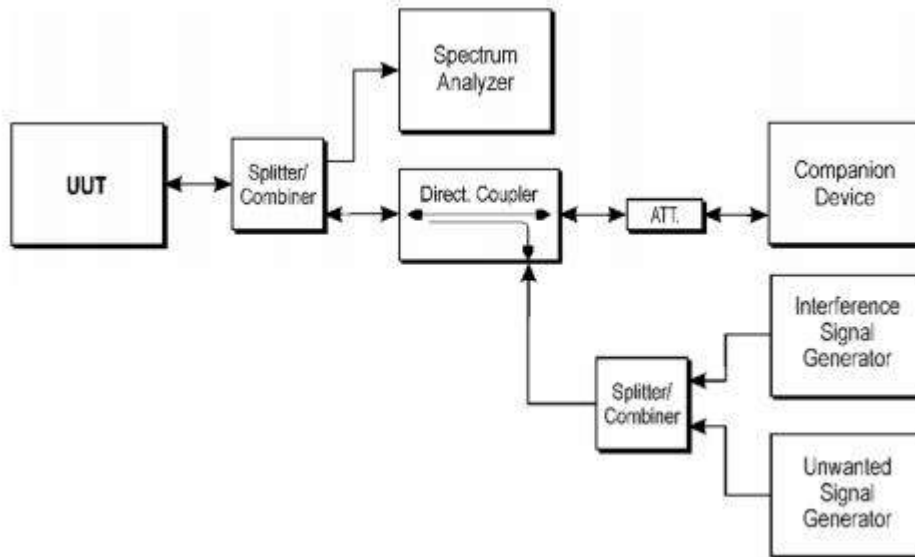

Interference and blocking signals are emulated by using a modulated signal and a continuous wave (CW) respectively, generated by the vector signal generator (VSG) and the continuous wave generator.

9.4 TEST RESULT


N/A

Remark: this requirement does not apply for equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.



10. OCCUPIED CHANNEL BANDWIDTH

10.1 BLOCK DIAGRAM OF TEST SETUP

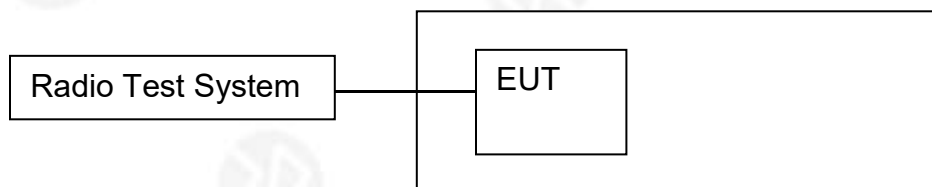

10.2 LIMIT

The Occupied Channel Bandwidth shall fall completely within the band given in 2.4GHz to 2.4835GHz. In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

10.3 TEST PROCEDURE

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: $\sim 1\%$ of the span without going below 1%
- Video BW: $3 \times \text{RBW}$
- Frequency Span: $2 \times \text{Nominal Channel Bandwidth}$
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

Step 2:

Wait for the trace to stabilize.

Find the peak value of the trace and place the analyser marker on this peak.

Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT.

This value shall be recorded.

NOTE: Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.




10.4 TEST RESULT

Condition	Modulation	Packet Type	Frequency (MHz)	Frequency Range (MHz)		Limit (MHz)	Channel Bandwidth (MHz)
NVNT	GFSK	1-DH5	2402	2401.466	/	>2400	0.8826
			2480	/	2479.637	<2483.50	0.8801
NVNT	$\pi/4$ -DQPSK	2-DH5	2402	2401.293	/	>2400	1.0498
			2480	/	2479.693	<2483.50	1.0470
NVNT	8-DPSK	3-DH5	2402	2401.421	/	>2400	1.0653
			2480	/	2479.644	<2483.50	1.0576



11. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

11.1 BLOCK DIAGRAM OF TEST SETUP

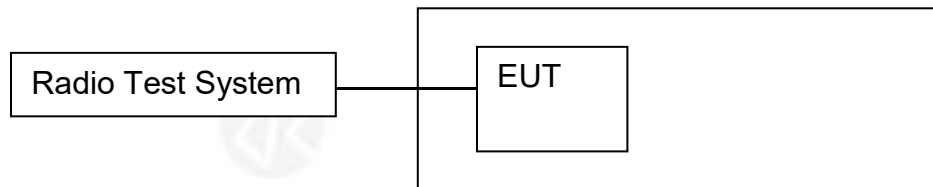

11.2 LIMIT

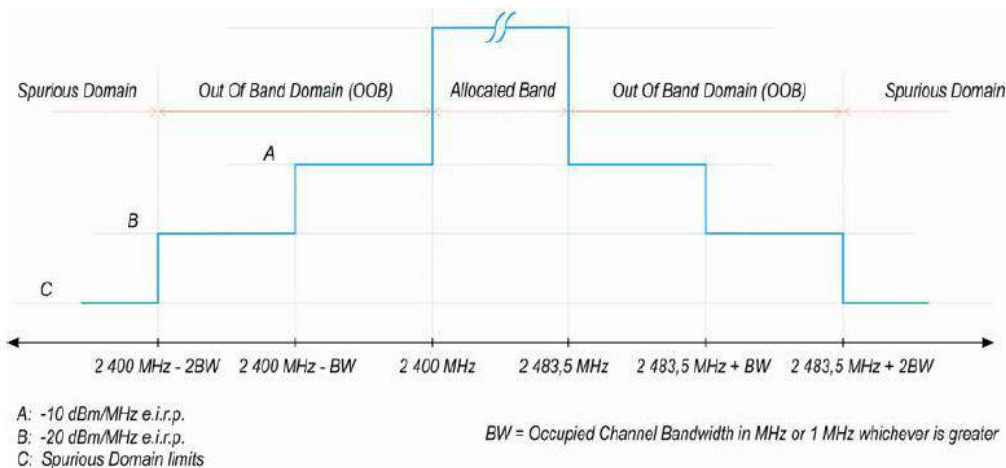


Figure 3: Transmit mask

11.3 TEST PROCEDURE

The applicable mask is defined by the measurement results from the tests performed under clause 5.3.8 (Occupied Channel Bandwidth).

The test procedure is further as described under clause 5.3.9.2.1.

The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the steps below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.

Step 1:

- Connect the UUT to the spectrum analyser and use the following settings:
- Centre Frequency: 2 484 MHz
- Span: 0 Hz
- Resolution BW: 1 MHz
- Filter mode: Channel filter
- Video BW: 3 MHz
- Detector Mode: RMS



- Trace Mode: Max Hold
- Sweep Mode: Continuous
- Sweep Points: Sweep Time [s] / (1 μ s) or 5 000 whichever is greater
- Trigger Mode: Video trigger

NOTE 1: In case video triggering is not possible, an external trigger source may be used.

- Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

Step 2 (segment 2 483,5 MHz to 2 483,5 MHz + BW):

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3 (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW):

- Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 4 (segment 2 400 MHz - BW to 2 400 MHz):

- Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 5 (segment 2 400 MHz - 2BW to 2 400 MHz - BW):

- Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 6:



- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits

provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.

- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:

- Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.

- Option 2: the limits provided by the mask given in figure 1 or figure 3 shall be reduced by $10 \times \log_{10}(A_{ch})$ and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.

NOTE 2: A_{ch} refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.



11.4 TEST RESULT

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Verdict
NVNT	1-DH5	Hopping	2399.5	-66.45	-10.00	-56.45	Pass
NVNT	1-DH5	Hopping	2398.5	-56.72	-20.00	-36.72	Pass
NVNT	1-DH5	Hopping	2484	-56.51	-10.00	-46.51	Pass
NVNT	1-DH5	Hopping	2485	-56.22	-20.00	-36.22	Pass
NVNT	1-DH5	Hopping	2399.5	-56.12	-10.00	-46.12	Pass
NVNT	1-DH5	Hopping	2398.5	-51.33	-20.00	-31.33	Pass
NVNT	1-DH5	Hopping	2484	-56.17	-10.00	-46.17	Pass
NVNT	1-DH5	Hopping	2485	-67.82	-20.00	-47.82	Pass
NVNT	2-DH5	Hopping	2399.5	-53.20	-10.00	-43.20	Pass
NVNT	2-DH5	Hopping	2398.5	-70.15	-20.00	-50.15	Pass
NVNT	2-DH5	Hopping	2484	-55.28	-10.00	-45.28	Pass
NVNT	2-DH5	Hopping	2485	-64.02	-20.00	-44.02	Pass
NVNT	2-DH5	Hopping	2399.5	-53.69	-10.00	-43.69	Pass
NVNT	2-DH5	Hopping	2398.5	-66.43	-20.00	-46.43	Pass
NVNT	2-DH5	Hopping	2484	-57.91	-10.00	-47.91	Pass
NVNT	2-DH5	Hopping	2485	-59.60	-20.00	-39.60	Pass
NVNT	3-DH5	Hopping	2399.5	-58.37	-10.00	-48.37	Pass
NVNT	3-DH5	Hopping	2398.5	-53.27	-20.00	-33.27	Pass
NVNT	3-DH5	Hopping	2484	-56.70	-10.00	-46.70	Pass
NVNT	3-DH5	Hopping	2485	-50.90	-20.00	-30.90	Pass
NVNT	3-DH5	Hopping	2399.5	-56.84	-10.00	-46.84	Pass
NVNT	3-DH5	Hopping	2398.5	-58.42	-20.00	-38.42	Pass
NVNT	3-DH5	Hopping	2484	-53.96	-10.00	-43.96	Pass
NVNT	3-DH5	Hopping	2485	-64.93	-20.00	-44.93	Pass




12. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN


12.1 BLOCK DIAGRAM OF TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

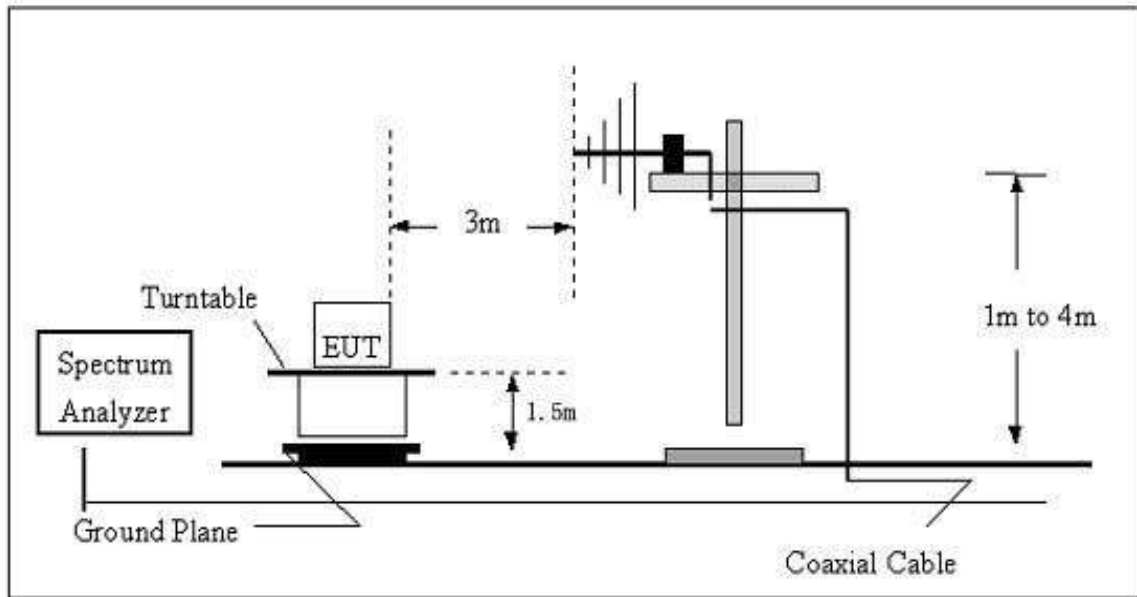

(B) Radiated Emission Test-Up Frequency Above 1GHz

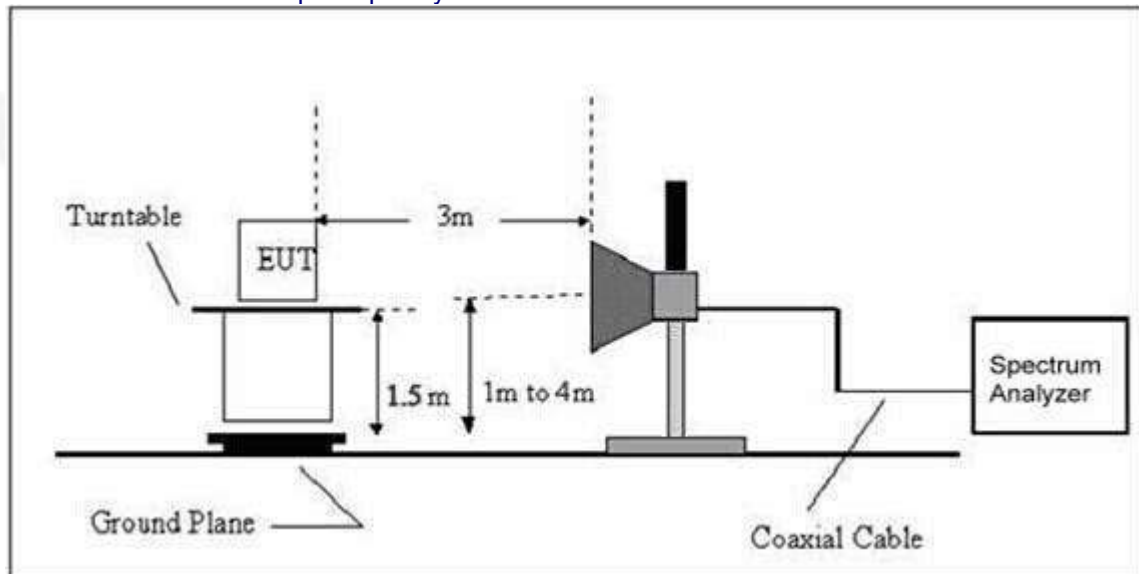

(C) Conducted Block Diagram Of Test Setup

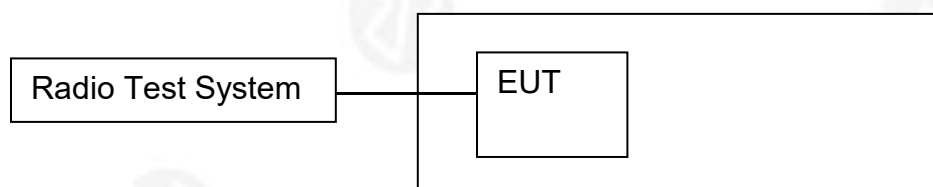



12.2 LIMITS

Frequency range	Maximum power, e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	RBW/VBW
30 MHz to 47 MHz	-36 dBm	100 kHz/300KHz
47 MHz to 74 MHz	-54 dBm	100 kHz/300KHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz/300KHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz/300KHz
118 MHz to 174 MHz	-36 dBm	100 kHz/300KHz
174 MHz to 230 MHz	-54 dBm	100 kHz/300KHz
230 MHz to 470 MHz	-36 dBm	100 kHz/300KHz
470 MHz to 862 MHz	-54 dBm	100 kHz/300KHz
862 MHz to 1 GHz	-36 dBm	100 kHz/300KHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz/3MHz

12.3 TEST PROCEDURE

The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting	
Frequency Start to Stop	30 MHz to 1000 MHz	1000 MHz to 12750MHz
Resolution bandwidth	100 kHz	1 MHz
Video bandwidth	300 kHz	3 MHz
Filter type	3 dB (Gaussian)	
Detector mode	Peak	
Trace Mode	Max Hold	
Sweep Points	$\geq 19\ 400$ (Set as 20000)	$\geq 23\ 500$ (Set as 24000)
Sweep Time	For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long,Below 1GHz such that for each 100 kHz frequency step, Above 1GHz such that for each 1MHz frequency step the measurement time is greater than two transmissions of the UUT, on any channel	



30MHz ~ 1GHz:

- a. The Product was placed on the nonconductive turntable 1.5 meters above the ground in a full anechoic chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Above 1GHz:

- a. The Product was placed on the non-conductive turntable 1.5 meters above the ground in a full anechoic chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.



12.4 TEST RESULTS

Radiated Transmitter Unwanted Emissions			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V

Frequency	Receiver Reading	Turn table Angle	Antenna		Substituted Factor	Absolute Level	Result	
			Height	Polar			Limit	Margin
(MHz)	(dBm)	Degree	(m)	(H/V)	(dB)	(dBm)	(dBm)	(dB)
GFSK Low channel								
562.171	-57.24	23	1.9	H	-9.59	-66.83	-54.00	-12.83
562.347	-56.37	273	1.7	V	-9.59	-65.96	-54.00	-11.96
4804.507	-47.82	195	1.1	H	-0.12	-47.94	-30.00	-17.94
4804.114	-48.04	68	1.6	V	-0.12	-48.16	-30.00	-18.16
7206.136	-60.14	78	1.9	H	0.55	-59.59	-30.00	-29.59
7206.214	-59.66	302	1.7	V	0.55	-59.11	-30.00	-29.11
GFSK Mid channel								
562.316	-58.38	230	1.7	H	-9.59	-67.97	-54.00	-13.97
562.506	-57.30	306	1.9	V	-9.59	-66.89	-54.00	-12.89
4882.348	-49.02	98	1.4	H	-0.12	-49.14	-30.00	-19.14
4882.135	-49.74	175	1.8	V	-0.12	-49.86	-30.00	-19.86
7323.219	-58.27	119	1.4	H	0.55	-57.72	-30.00	-27.72
7323.591	-58.78	168	1.9	V	0.55	-58.23	-30.00	-28.23
GFSK High channel								
562.446	-56.15	278	2	H	-9.59	-65.74	-54.00	-11.74
562.445	-58.07	204	2	V	-9.59	-67.66	-54.00	-13.66
4960.278	-49.14	286	1.7	H	-0.12	-49.26	-30.00	-19.26
4960.053	-48.78	198	1.3	V	-0.12	-48.90	-30.00	-18.90
7440.534	-59.29	59	1.8	H	0.55	-58.74	-30.00	-28.74
7440.357	-59.68	335	1.6	V	0.55	-59.13	-30.00	-29.13
Remark: Absolute Level = Receiver Reading + Factor, Margin = Absolute Level - Limit. All modes passed the test and only the worst data -GFSK - was recorded.								




13. RECEIVER SPURIOUS EMISSIONS


13.1 BLOCK DIAGRAM OF TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

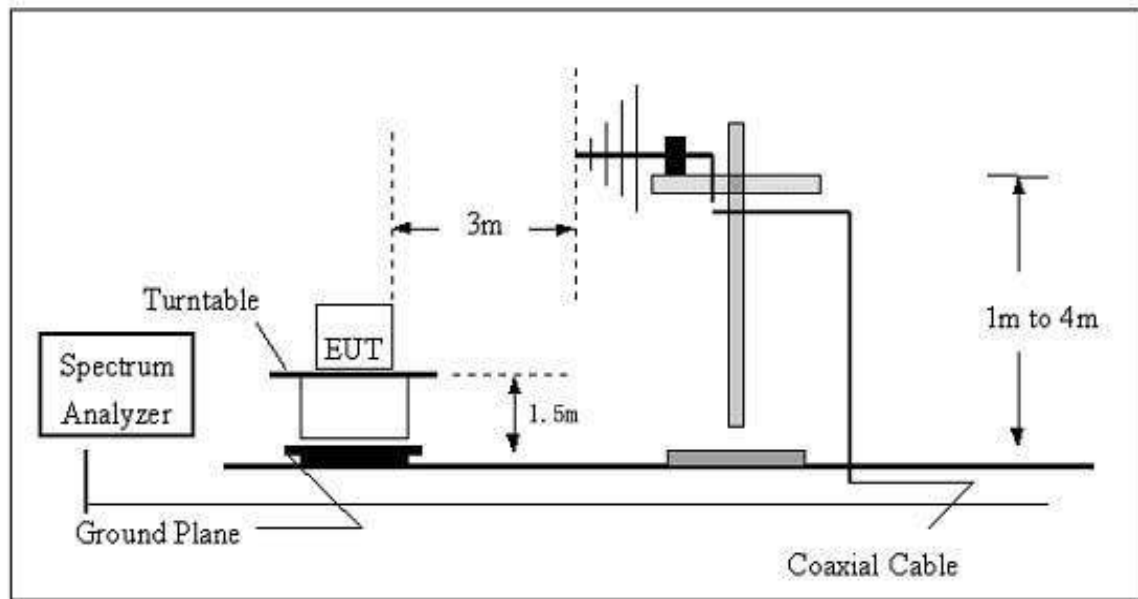

(B) Radiated Emission Test-Up Frequency Above 1GHz

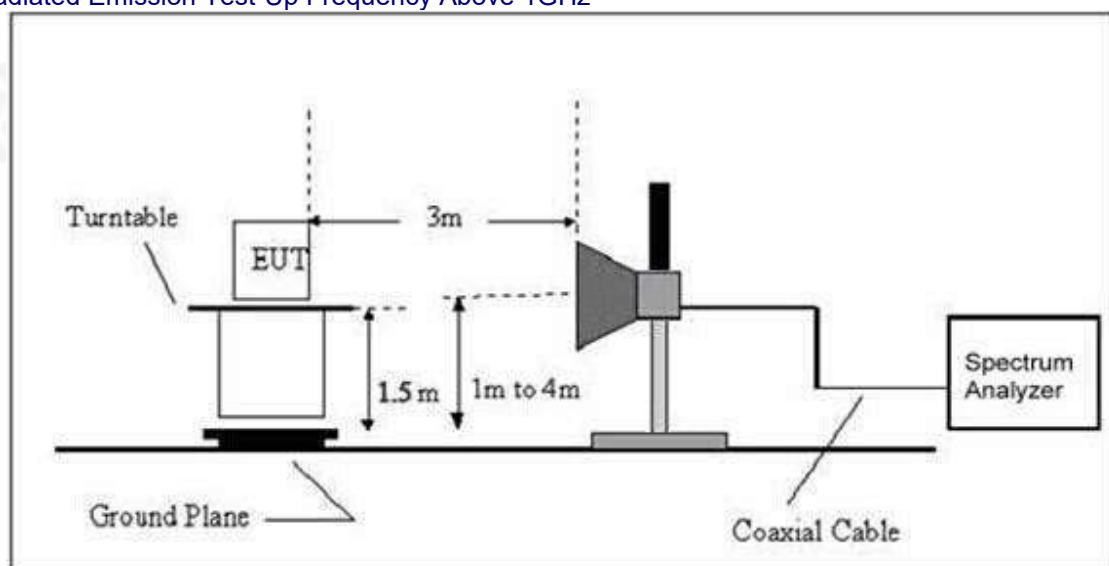

(C) Conducted Block Diagram Of Test Setup

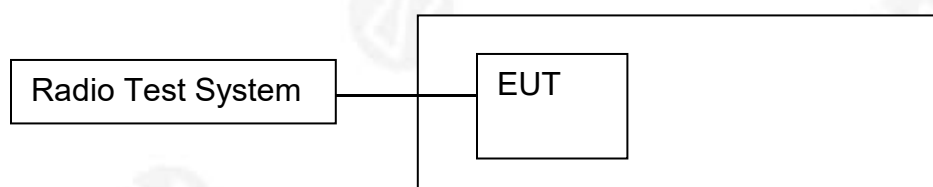



13.2 LIMITS

Frequency(MHz)	Limit
30-1000	-57dBm
1000-12750	-47dBm

13.3 TEST PROCEDURE

The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting	
Frequency Start to Stop	30 MHz to 1000 MHz	1000 MHz to 12750MHz
Resolution bandwidth	100 kHz	1 MHz
Video bandwidth	300 kHz	3 MHz
Filter type	3 dB (Gaussian)	
Detector mode	Peak	
Trace Mode	Max Hold	
Sweep Points	≥ 19 400 (Set as 20000)	≥ 23 500 (Set as 24000)
Sweep Time	For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long,Below 1GHz such that for each 100 kHz frequency step, Above 1GHz such that for each 1MHz frequency step the measurement time is greater than two transmissions of the UUT, on any channel	

30MHz ~ 1GHz:

- The Product was placed on the nonconductive turntable 1.5 meters above the ground in a full anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Above 1GHz:

- The Product was placed on the non-conductive turntable 1.5 meters above the ground in a full anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.



13.4 TEST RESULTS


Radiated Receiver Spurious Emissions			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V

Frequency	Receiver Reading	Turn table Angle	Antenna		Substituted Factor	Absolute Level	Result	
			Height	Polar			Limit	Margin
(MHz)	(dBm)	Degree	(m)	(H/V)	(dB)	(dBm)	(dBm)	(dB)
GFSK Low channel								
571.346	-51.84	346	1.5	H	-9.64	-61.48	-54.00	-7.48
570.855	-51.71	90	1.1	V	-9.64	-61.35	-54.00	-7.35
3232.682	-69.71	309	1.3	H	1.41	-68.30	-47.00	-21.30
3232.795	-69.11	264	1.6	V	1.41	-67.70	-47.00	-20.70
8902.204	-73.31	346	1.5	H	15.44	-57.87	-47.00	-10.87
8902.248	-72.06	90	1.1	V	15.44	-56.62	-47.00	-9.62
GFSK Mid channel								
677.493	-51.26	222	1.6	H	-7.68	-58.94	-54.00	-4.94
677.797	-50.85	105	1.7	V	-7.68	-58.53	-54.00	-4.53
2263.530	-68.61	203	1.4	H	-0.12	-68.73	-47.00	-21.73
2263.432	-70.18	67	1.2	V	-0.12	-70.30	-47.00	-23.30
9695.596	-73.84	222	1.6	H	18.08	-55.76	-47.00	-8.76
9695.695	-74.54	105	1.7	V	18.08	-56.46	-47.00	-9.46
GFSK High channel								
532.356	-51.69	148	1.1	H	-10.73	-62.42	-54.00	-8.42
532.567	-51.14	333	1.3	V	-10.73	-61.87	-54.00	-7.87
9666.150	-68.77	18	1.6	H	17.98	-50.79	-47.00	-3.79
9665.777	-70.25	80	1.8	V	17.98	-52.27	-47.00	-5.27
11575.486	-72.67	148	1.1	H	20.23	-52.44	-47.00	-5.44
11575.080	-72.40	333	1.3	V	20.23	-52.17	-47.00	-5.17
Remark: Absolute Level = Receiver Reading + Factor, Margin = Absolute Level - Limit. All modes passed the test and only the worst data -GFSK - was recorded.								



14. RECEIVER BLOCKING

14.1 BLOCK DIAGRAM OF TEST SETUP

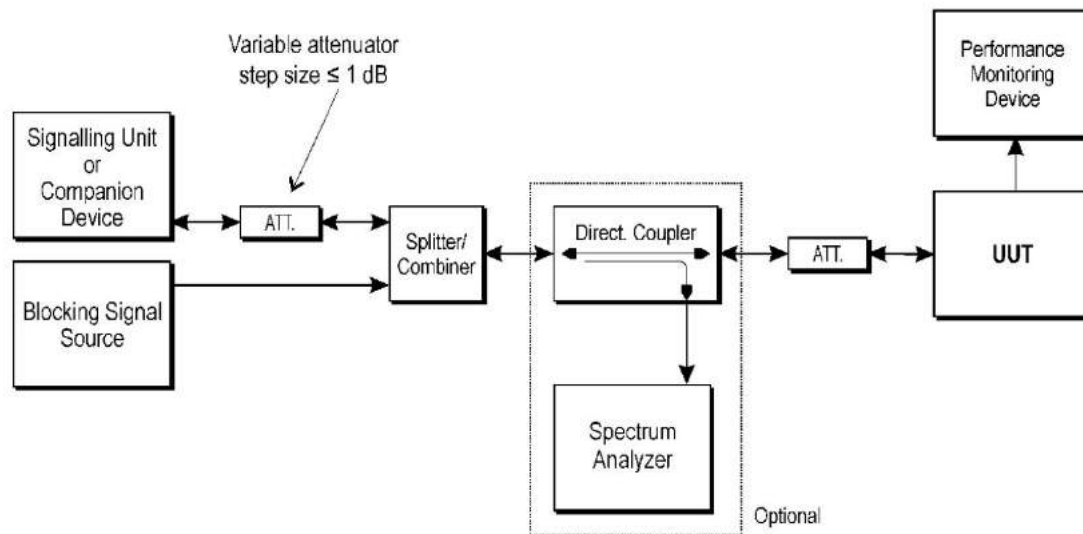

14.2 LIMIT

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.

Table 14: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal		
$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW		
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674				
NOTE 1: OCBW is in Hz.					
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.					
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.					
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.					



Table 15: Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Table 16: Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

14.3 TEST PROCEDURE

Refer to ETSI EN 300 328 Clause 5.4.11.2.



14.4 TEST RESULT

Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Receiver Category:	2		

Test Mode	Test Channel (MHz)	Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	PER (%)	Limit (%)	Result
GFSK 1-DH5	2402	-69.66	2380	-34	3.75	10	Pass
			2504		2.85	10	Pass
			2300		3.64	10	Pass
			2584		2.13	10	Pass
	2480	-69.54	2380	-34	3.56	10	Pass
			2504		2.94	10	Pass
			2300		3.62	10	Pass
			2584		2.01	10	Pass

Note: The wanted signal mean power from the companion device and the blocking signal power level values are compensated with the declared antenna gain on table above.
All modes were tested and only the worst GFSK-1-DH5 mode was recorded.




15. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission Test Setup 1
30 MHz - 1 GHz (Transmitter tests)



Radiated Emission Test Setup 2
1 GHz - 12.75 GHz (Transmitter tests)

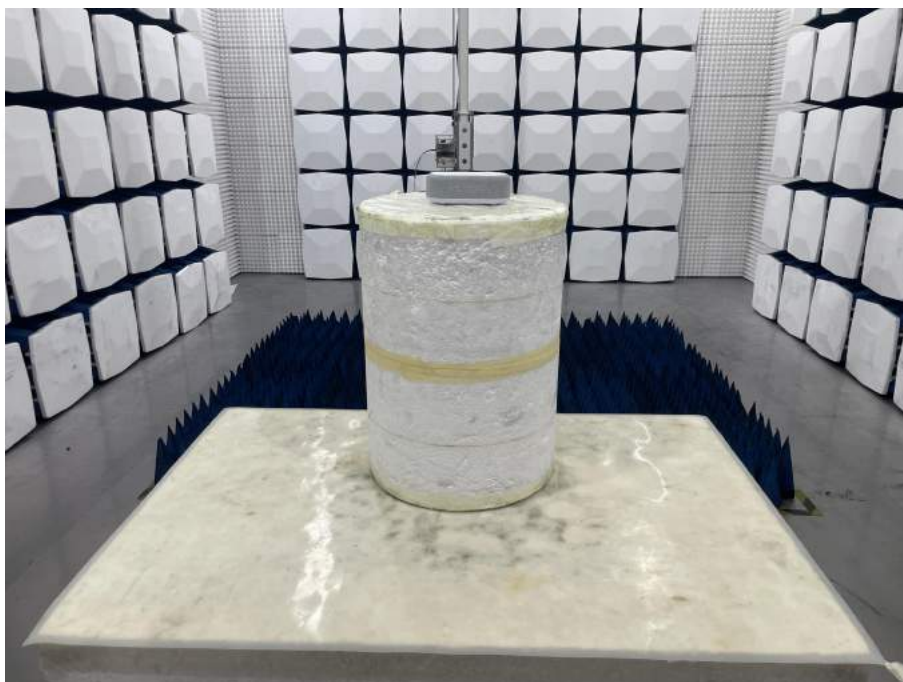




16. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2

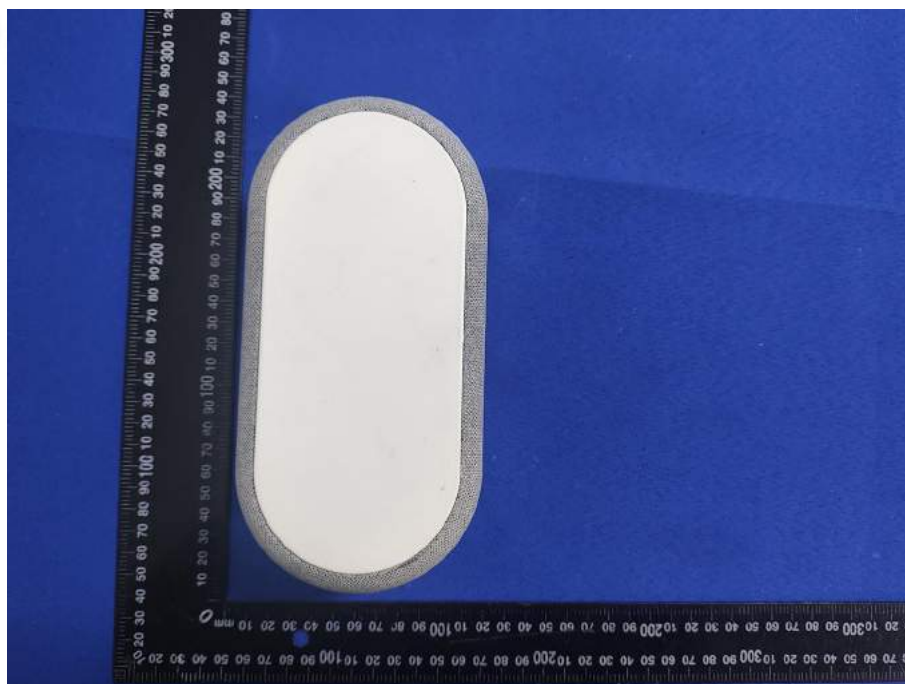



EUT Photo 3



EUT Photo 4





EUT Photo 5




EUT Photo 6






EUT Photo 7

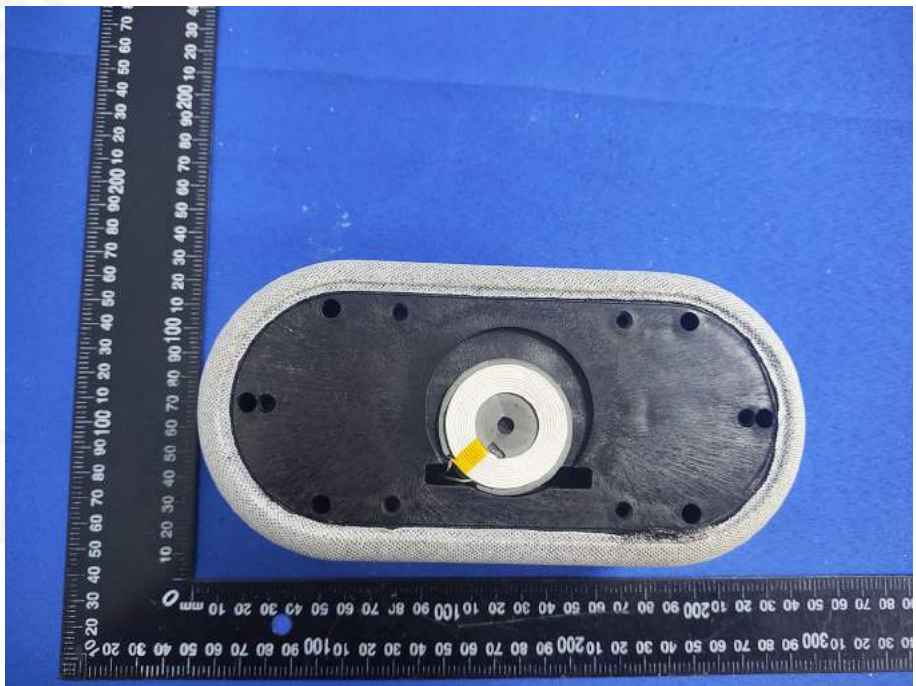


EUT Photo 8

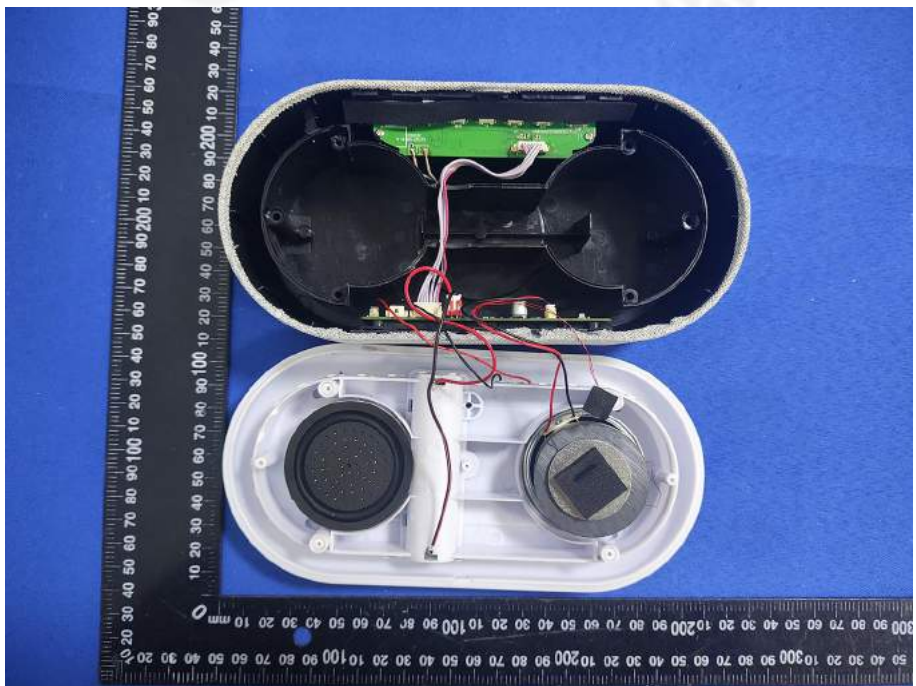





EUT Photo 9

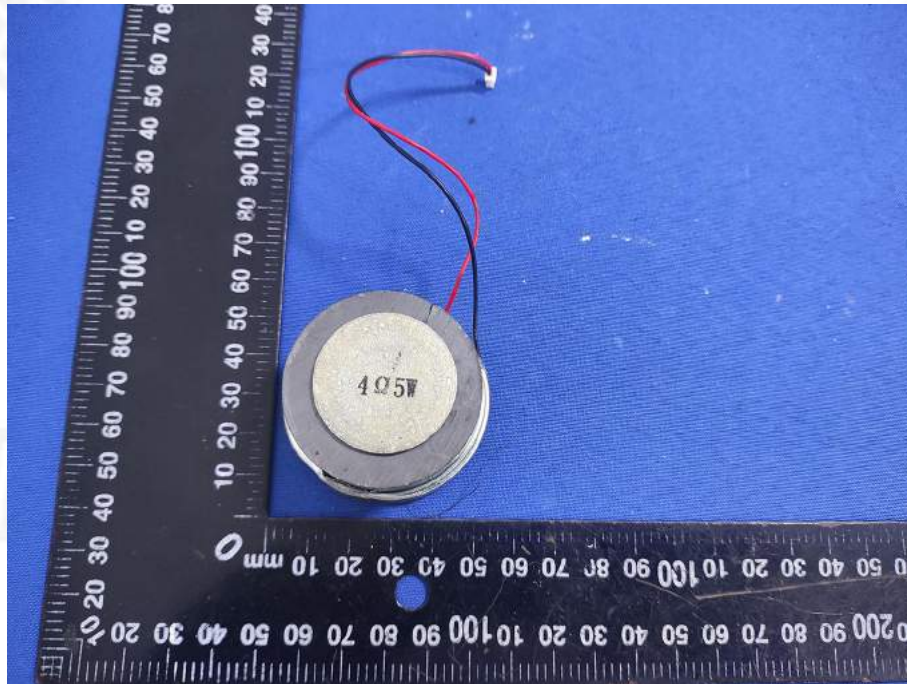


EUT Photo 10

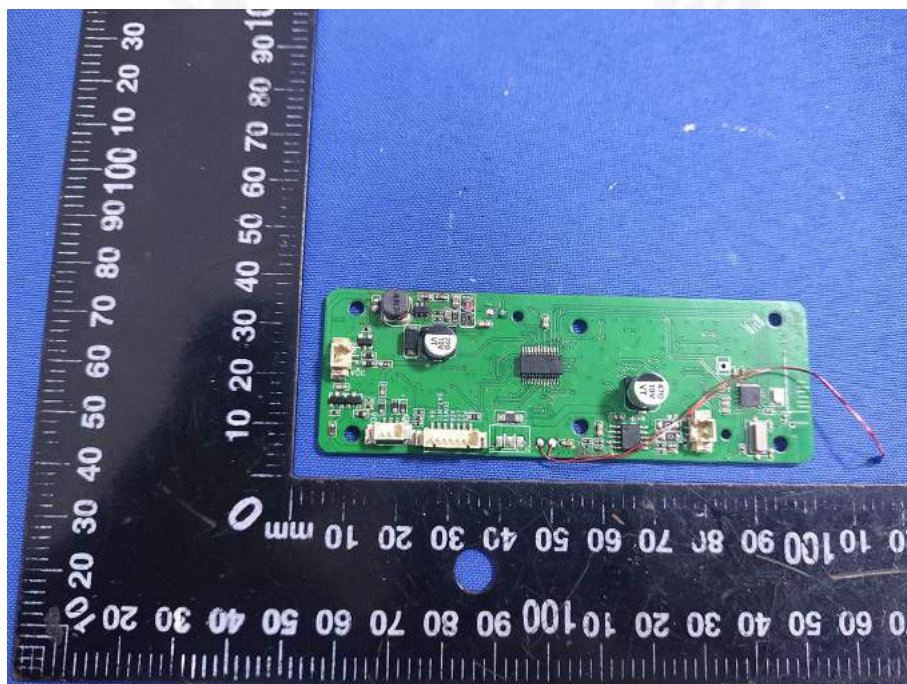

EUT Photo 11

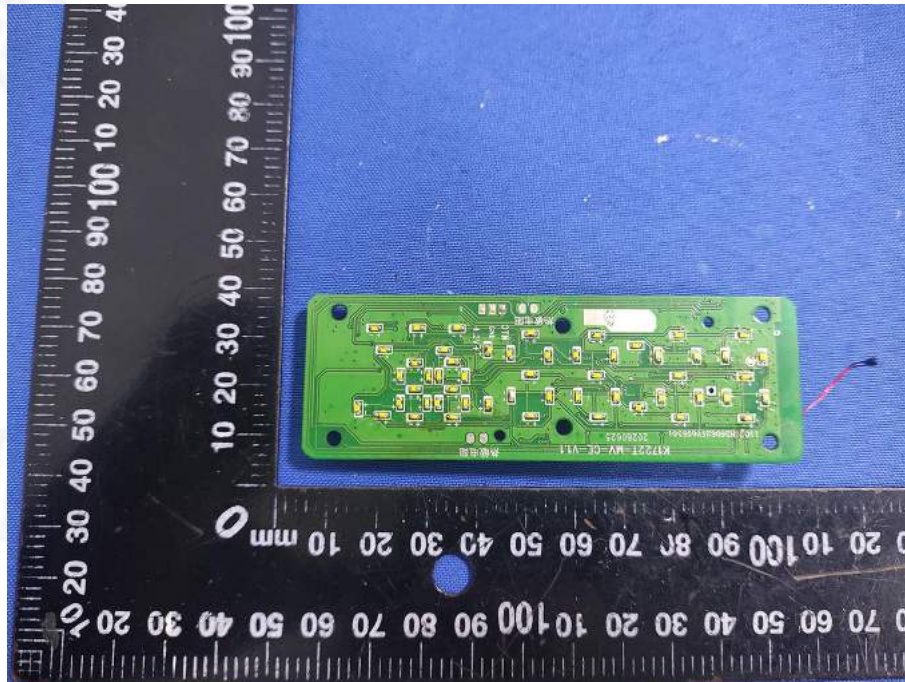


EUT Photo 12

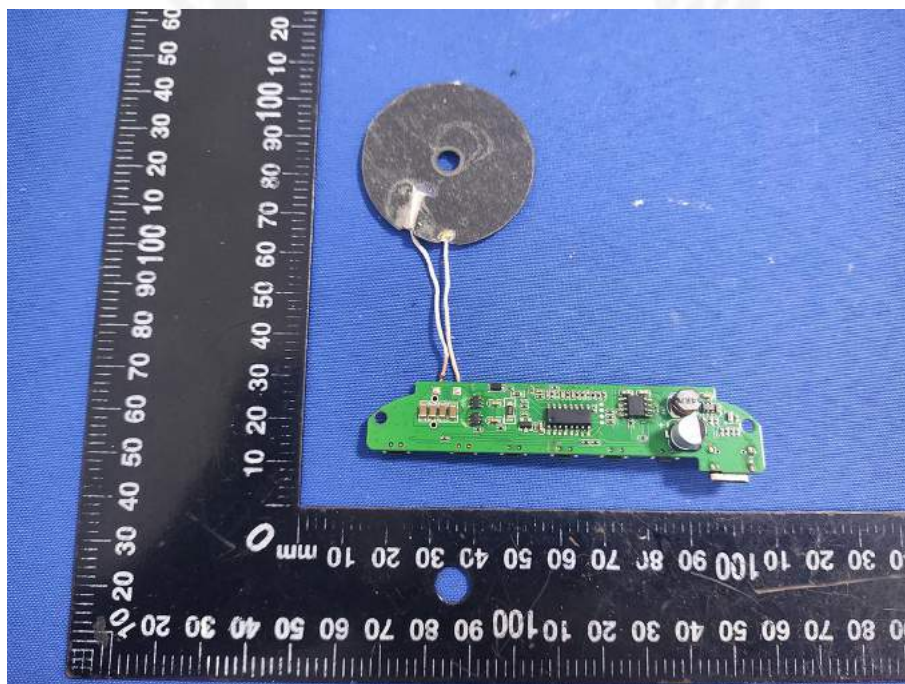



EUT Photo 13

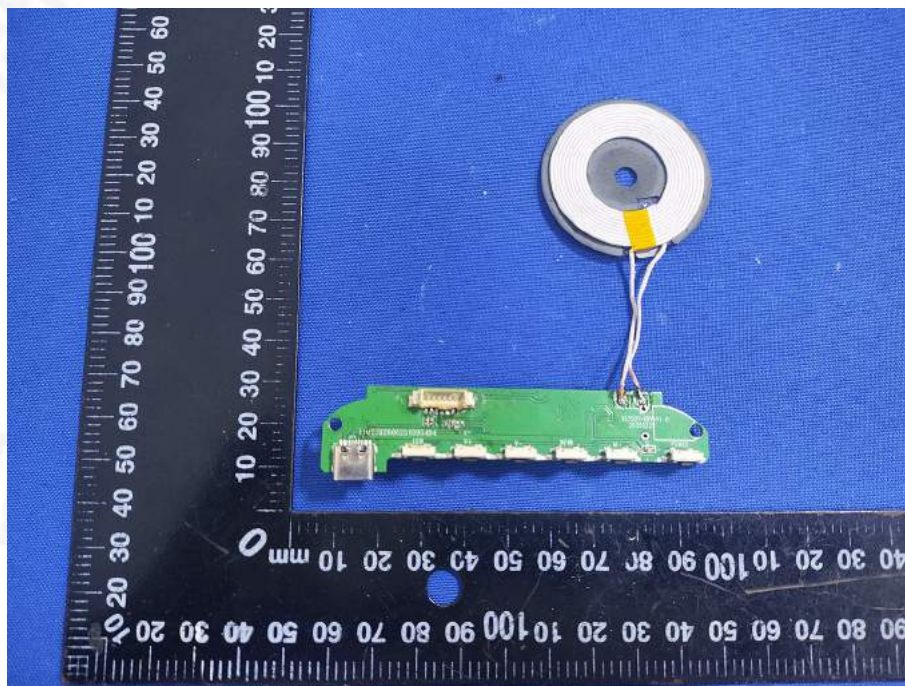

***** END OF REPORT *****



RADIO TEST REPORT

Report Number.....: **ZKT-2608251577E-4**

Date of Test.....: Aug. 25, 2026 to Sep. 01, 2026

Date of issue.....: Sep. 01, 2026

Total number of pages.....: 34

Test Result: PASS

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: **Mid Ocean Brands B.V.**

Address: Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.

Manufacturer's name: 117486

Address: N/A

Test specification:

Standard.....: ETSI EN 303 417 V1.1.1 (2017-09)

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-137_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: **Wireless Speaker**

Trademark: N/A

Model/Type reference.....: MO2378

Ratings.....: Input: 5V --- 3A, 9V --- 3A

Output: DC5V---1A, 7.5V---1A, 9V---1.1A, 12V---1.25A

Battery: 3.7V, 1200mAh, 4.44Wh



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





TABLE OF CONTENT

	Page
1. Version	5
2. Test Summary	6
3. MEASUREMENT UNCERTAINTY	7
3.1 TEST FACILITY	7
3.2 MEASUREMENT UNCERTAINTY	7
4. General Information	8
4.1 General Description of E.U.T.	8
4.2 Description of Support Units	8
4.3 Deviation from Standards	8
4.4 Other Information Requested by the Customer	8
4.5 Test Instruments list	9
5. RF Requirements	11
5.1 Normal Test Conditions:	11
5.2 Extreme Test Conditions:	11
5.3 Test Mode	11
5.4 Performance criteria	12
5.5 On-sit testing	12
6. Permitted range of operating frequencies	13
6.1 Definition	13
6.2 Limit	14
6.3 EUT Operation Condition	14
6.4 Test Procedure	14
6.5 Test Setup	14
6.6 Test Result	14
7. H-field requirements	15
7.1 Definition	15
7.2 Limit	15
7.3 EUT Operation Condition	15
7.4 Test Procedure	15
7.5 Test Procedure	16
7.6 Test Result	17
8. Transmitter Spurious Emissions	18
8.1 Definition	18
8.2 Limit	19
8.3 EUT Operation Condition	19
8.4 Test Procedure	19
8.5 Test Setup	21
8.6 Test Result	22
9. Transmitter out of band (OOB) emissions	23
9.1 Definition	23
9.2 Limit	23
9.3 EUT Operation Condition	23
9.4 Test Procedure	23
9.5 Test Result	24
10. WPT system unwanted conducted emissions	25
10.1 Definition	25
10.2 Limit	25



10.3 Test Procedure	25
10.4 Test Result	25
11. Receiver blocking(Receiver Conformance requirements)	26
11.1 Definition	26
11.2 Limit	26
11.3 Test Procedure	26
11.4 Test Result	26
12. Test Setup Photo	27
13. Photos of the EUT	28



1. Version

Report No.	Issue Date	Description	Approved
ZKT-2608251577E-4	Sep. 01, 2026	Original	Valid



2. Test Summary

Relationship between the present document and the essential requirements of Directive 2014/53/EU

Harmonised Standard ETSI EN 303 417			
No	Description	Clause No	Results
Transmitter Parameters			
1	Permitted range of operating frequencies	4.3.2	PASS
2	Operating frequency ranges	4.3.3	PASS
3	H-field requirements	4.3.4	PASS
4	Transmitter spurious emissions	4.3.5	PASS
5	Transmitter out of band (OOB) emissions	4.3.6	PASS
6	WPT system unwanted conducted emissions	4.3.7	N/A
7	Receiver blocking	4.3.2	PASS
Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.			

Remark:

1. N/A: not applicable. Refer to the relative section for the details.
2. The EUT does not have receive function.
3. For the test methods, according to the present document the uncertainty figures is calculated according to the methods described in TR 100 028 and correspond to an expansion factor (coverage factor) $k=2$ (which provide confidence levels of respectively 95 %).
4. Tx: In this whole report Tx (or tx) means Transmitter.
5. Rx: In this whole report Rx (or rx) means Receiver.
6. RF: In this whole report RF means Radio Frequency.



3. MEASUREMENT UNCERTAINTY

3.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 927491

Designation Number: CN1431

IC Registered No.: 27033

CAB identifier: CN0110

Designation Number: CN0110

3.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.3\text{dB}$
2	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=4.5\text{dB}$
3	RF frequency	1×10^{-7}
4	RF power, conducted	$\pm 1.0 \text{ dB}$
5	Conducted emission of receivers	$\pm 1 \text{ dB}$
6	Radiated emission of receiver	$\pm 6 \text{ dB}$



4. General Information

4.1 General Description of E.U.T.

Product Name:	Wireless Speaker
Trade Mark:	N/A
Model No.:	MO2378
Serial No.:	N/A
Model Differences:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	110kHz ~ 205kHz
Antenna Type:	Loop Coil Antenna
Modulation Type:	ASK
Antenna Gain:	0dBi Note the antenna gain is provided by the customer, and the final test result has nothing to do with us.
Power Supply:	Input: 5V --- 3A, 9V --- 3A Output: DC5V---1A, 7.5V---1A, 9V---1.1A, 12V---1.25A
Battery Capacity:	3.7V, 1200mAh, 4.44Wh (Only supports playing music)

4.2 Description of Support Units

The EUT was test as an independent unit

4.3 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna.

4.4 Other Information Requested by the Customer

None.



4.5 Test Instruments list

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESC17	100969	4.32	Oct. 24, 2025	Oct. 23, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 20, 2025	Sep. 19, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 20, 2025	Sep. 19, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2025	Sep. 29, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Sep. 20, 2025	Sep. 19, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 19, 2025	Sep. 18, 2026
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 19, 2025	Sep. 18, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Oct. 24, 2025	Oct. 23, 2026
11	Test Cable	N/A	R-01	N/A	N/A	May. 25, 2026	May. 24, 2027
12	Test Cable	N/A	R-02	N/A	N/A	May. 25, 2026	May. 24, 2027
13	Test Cable	N/A	R-03	N/A	N/A	May. 25, 2026	May. 24, 2027
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	Test Cable	N/A	RF-01	N/A	N/A	May. 25, 2026	May. 24, 2027
4	Test Cable	N/A	RF-02	N/A	N/A	May. 25, 2026	May. 24, 2027
5	Test Cable	N/A	RF-03	N/A	N/A	May. 25, 2026	May. 24, 2027
6	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Sep. 19, 2025	Sep. 18, 2026
7	Signal Generator	Agilent	N5182A	N/A	A.01.87	Sep. 20, 2025	Sep. 19, 2026
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344/M-1752	N/A	Sep. 25, 2025	Sep. 24, 2026
9	SHIELD BOX	TESCOM	TC-5970C	5970C015553	N/A	Dec. 18, 2025	Dec. 17, 2026
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 28, 2025	Sep. 27, 2026
11	MWRF Power Meter Test system	MW	MW100-RFCB	N/A	N/A	Sep. 19, 2025	Sep. 18, 2026
12	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
13	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



5. RF Requirements

5.1 Normal Test Conditions:

Ambient Condition: 22 °C , 55 %RH

5.2 Extreme Test Conditions:

Extreme Temperature: -20°C to +55°C;

Extreme Power Source Voltages:

1). Mains voltage

The extreme test voltage for equipment to be connected to an AC mains source shall be the nominal mains voltage $\pm$ 10 %.

2). Lead-acid battery power sources used on vehicles

When radio equipment is intended for operation from the usual type of alternator fed lead-acid battery power source used on vehicles, then extreme test voltage shall be 1,3 and 0,9 times the nominal voltage of the battery (6 V, 12 V, etc.).

3). Power sources using other types of batteries

The Low extreme test voltages for equipment with power sources using the following types of battery shall be:

- for the Leclanché or lithium type battery: 0,85 times the nominal voltage of the battery;
- for the mercury or nickel-cadmium type of battery: 0,9 times the nominal voltage of the battery.

In both cases, the High extreme test voltage shall be 1,15 times the nominal voltage of the battery.

4). Other power sources

For equipment using other power sources, or capable of being operated from a variety of power sources (primary or secondary), the extreme test voltages shall be those stated by the manufacturer and shall be recorded.

The follow condition is applicable

Test Conditions	LTLV	LTHV	HTHV	HTLV
Temperature (°C)	-20	-20	55	55
Voltage (VDC)	8.1	9.9	9.9	8.1

5.3 Test Mode

The manufacturer shall provide one or more samples of the WPT system, as appropriate for testing. Standalone WPT systems shall be offered by the manufacturer complete with any ancillary equipment needed for testing. If a WPT system has several optional features, considered not to affect the emission parameters then the tests need only to be performed on the WPT system configured with that combination of features considered to be the most complex, as proposed by the manufacturer and agreed by the test laboratory. The performance of the WPT system submitted for testing shall be representative of the performance of the corresponding production model.

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Test frequency
Transmitting	110kHz ~ 205kHz
Receiving	110kHz ~ 205kHz



5.4 Performance criteria

A WPT system always consists of a base station and a mobile device which are in proximity to each other. The performance of a WPT system is dependent on the related operational mode, see clause 4.2.3 in ESTI 303 417.

For the purpose of the receiver performance tests, the WPT system shall produce an appropriate output under normal conditions as indicated below:

- use as intended without degradation of performance; or
- a degradation of the performance is indicated by the WPT system as described in the manual

The manufacturer shall declare the performance criteria used to determine the performance of the receiving parts inside the WPT system (related to the mode).

5.5 On-sit testing

In certain cases it may not be possible to provide representative samples of antennas and/or equipment due to physical constraints. In these cases equivalent measurements to the present document shall be made at a representative installation of the equipment (on-site)



6. Permitted range of operating frequencies

6.1 Definition

The operating frequency range is the frequency range over which the WPT system is intentionally transmitting (all operational modes, see clause 4.2.3, Table 2).

The operating frequency range(s) of the WPT system are determined by the lowest (f_L) and highest frequency (f_H) as occupied by the power envelope.

The WPT system could have more than one operating frequency range.

For a single frequency systems the OFR is equal to the occupied bandwidth (OBW) of the WPT system.

For multi-frequency systems the OFR is described in figures 2 and 3 .

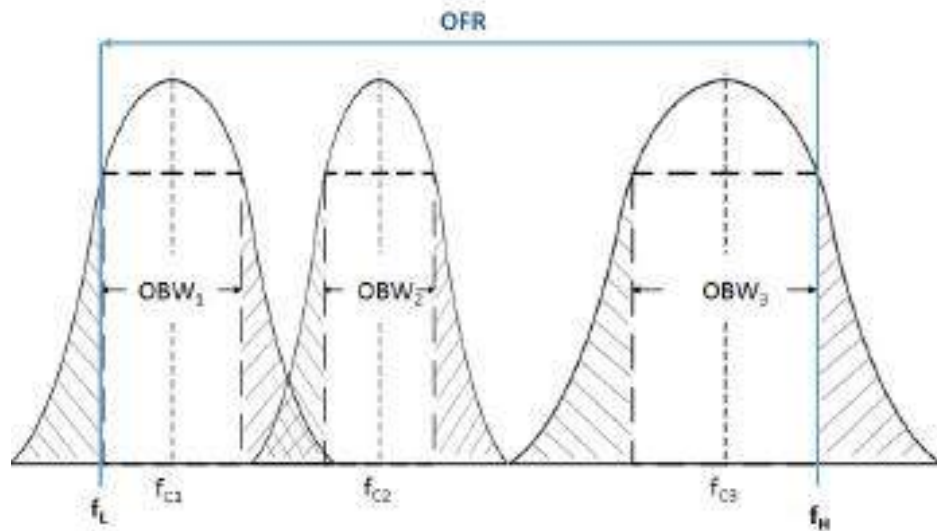


Figure 2: OFR of a multi - frequency WPT system within one frequency range of Table 2 and within one WPT system cycle time

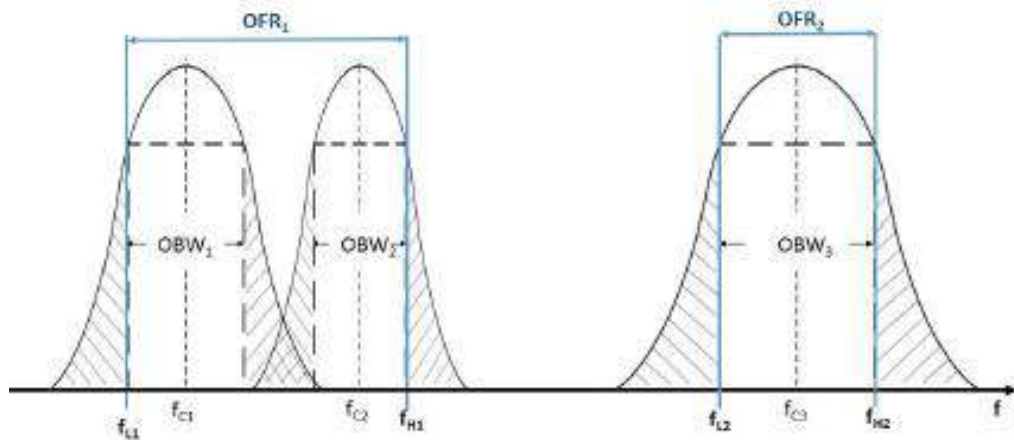


Figure 3: OFR of a multi - frequency WPT system within two frequency ranges of Table 2 and within one WPT system cycle time



6.2 Limit

The operating frequency range for emissions shall be within one of the following limits: 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.

6.3 EUT Operation Condition

The EUT was programmed to be in continuously transmitting mode.

6.4 Test Procedure

1. The occupied bandwidth of the EUT, e.g. the minimum and maximum output frequencies at which the permitted spurious and out-of-band emission levels are exceeded due to intentional emission from the radio transmitter shall be measured using the method shown in below figure.
2. The measuring receiver was a spectrum analyser which was appropriate to perform the intended measurement of the EUT.

6.5 Test Setup

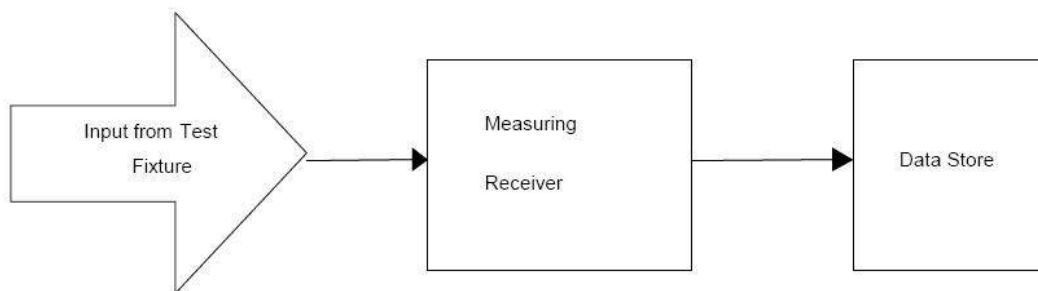


Figure 1: Test set-up for measuring the operating frequency range

6.6 Test Result

The operating frequency of the EUT is 100kHz-205kHz , it is within the permitted frequency rang 100 kHz to 300kHz. Outside the permitted range the unintentional emissions was reduced to the spurious emission limits. Refer to RSE test data for further details.



7. H-field requirements

7.1 Definition

The radiated H-field is defined in the direction of maximum field strength under specified conditions of measurement.

7.2 Limit

The H-field limits are provided in Table 3.

They have been specified for control of any radiated emissions within the OFR originating from the WPT system (power transmission and accompanying data communication).

The H-field limits in Table 3 are EU wide harmonised according to EC Decision 2013/752/EU [i.1]. Further information is available in ERC/REC 70-03 [i.1].

Table 3: H-field limits

Frequency range [MHz]	H-field strength limit [dB μ A/m at 10 m]	Comments
$0,019 \leq f < 0,021$	72	
$0,059 \leq f < 0,061$	69,1 descending 10 dB/dec above 0,059 MHz	See note 1
$0,079 \leq f < 0,090$	67,8 descending 10 dB/dec above 0,079 MHz	See note 2
$0,100 \leq f < 0,119$	42	
$0,119 \leq f < 0,135$	66 descending 10 dB/dec above 0,119 MHz	See note 1
$0,135 \leq f < 0,140$	42	
$0,140 \leq f < 0,1485$	37,7	
$0,1485 \leq f < 0,30$	-5	
$6,765 \leq f < 6,795$	42	
NOTE 1: Limit is 42 dB μ A/m for the following spot frequencies: 60 kHz $\pm$ 250 Hz and 129,1 kHz $\pm$ 500 Hz.		
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.		

7.3 EUT Operation Condition

The EUT was programmed to be in continuously transmitting mode.

7.4 Test Procedure

1. The measurements of the transmitter radiated H-field was made on an semi-anechoic chamber. Any measured values were at least 6 dB above the ambient noise level.
2. The H-field produced by the equipment was measured at standard distance of 10 m.
3. The H-field was measured with a shielded loop antenna connected to a measurement receiver. The measuring bandwidth and detector type of the measurement receiver was in accordance with below table.


Frequency: (f)	Detector type	Measurement receiver bandwidth	Spectrum analyser bandwidth
$9 \text{ kHz} \leq f < 150 \text{ kHz}$	Quasi Peak	200 Hz	300 Hz
$150 \text{ kHz} \leq f < 30 \text{ MHz}$	Quasi Peak	9 kHz	10 KHz
$30 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$	Quasi Peak	120 kHz	100 kHz
NOTE: For the measurement of the ranges $6,765 \text{ MHz} \leq f \leq 6,795 \text{ MHz}$ and $13,553 \text{ MHz} \leq f \leq 13,567 \text{ MHz}$, the measurement bandwidth has to be 200 Hz respectively 300 Hz.			

4. The equipment under test operated with normal modulation
5. The measurements were made under normal and extreme conditions.
6. For measuring equipment calibrated in dB μ V/m, the reading should be reduced by 51.5 dB to be converted to dB μ A/m.



7.5 Test Procedure

Please see the 6.4 in this report.

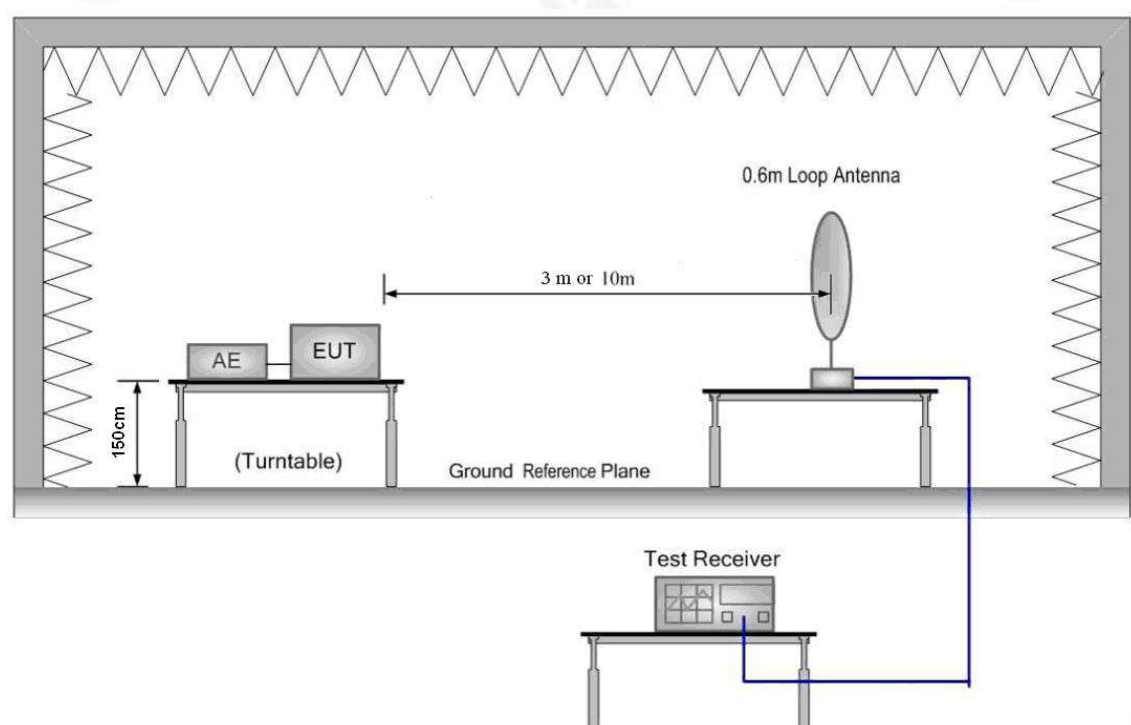



7.6 Test Result

Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Coil :	Coil 1

Operating Mode with Modulation											
Indicated			Table Angle Degree	Antenna Height (m)	Detector	Correction Factor (dB)	Corrected Amplitude (dBμV/m) @3m	Corrected Amplitude (dBμA/m) @3m	EN 303 417		
Freq. (kHz)	Voltage (V _{DC})	Maximum Reading (dBμV) @3m							Limit		Result
									(dBμA/m) @10m	(dBμA/m) @3m	
113.50	9	82.55	226	0.8	QP	19.88	102.43	50.93	42	73.3	Pass
Note: H _{3m} =H _{10m} + 31.3, dBμA/m = dBμV/m - 51.5.											

Standby Mode											
Indicated			Table Angle Degree	Antenna Height (m)	Detector	Correction Factor (dB)	Corrected Amplitude (dBµV/m) @3m	Corrected Amplitude (dBµA/m) @3m	EN 303 417		
Freq. (kHz)	Voltage (V _{DC})	Maximum Reading (dBµV) @3m							Limit		Result
									(dBµA/m) @10m	(dBµA/m) @3m	
113.50	9	/	360	0.8	QP	/	/	/	42	73.30	Pass
Note: Not applicable, for the ERP level of the EUT was too weak to be detected.											



8. Transmitter Spurious Emissions

8.1 Definition

The transmitter spurious emissions for a single frequency system are to be considered in frequency ranges defined in Figure 4 ($f < f_{SL}$ and $f > f_{SH}$).

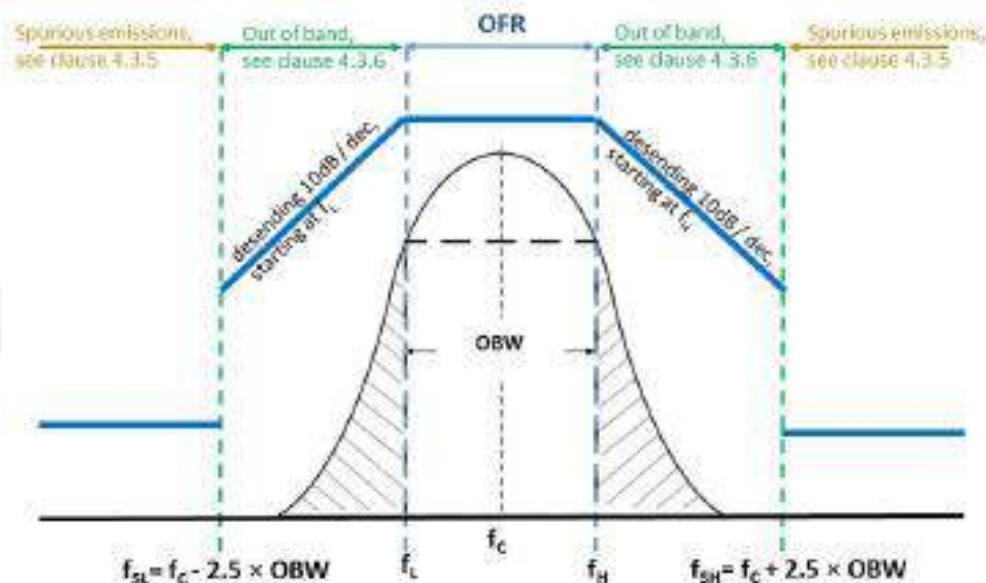


Figure 4: Out of band and spurious domain of a single frequency WPT system

The transmitter spurious emissions for a multi frequency system (within one WPT frequency range from Table 2) are to be considered in frequency ranges defined in Figure 5 ($f < f_{SL}$ and $f > f_{SH}$).

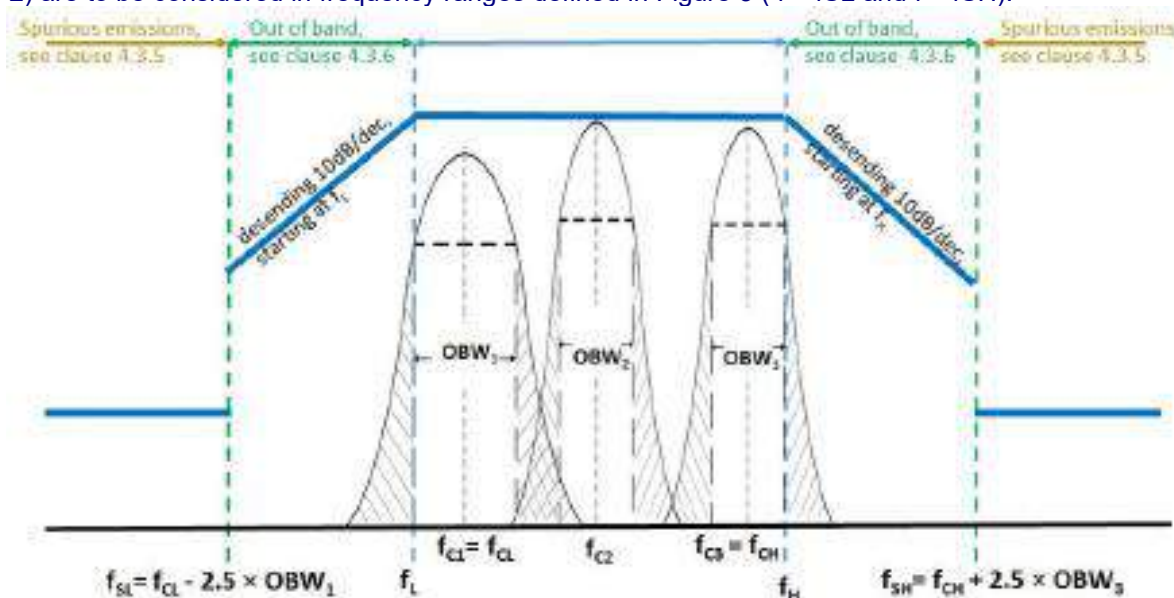


Figure 5: Out of band and spurious domain of a multi - frequency system
(during one WPT system cycle time)



8.2 Limit

The radiated field strength of spurious emissions below 30 MHz shall not exceed the generated H-field given in Table 4.

Table 4

State (see note)	Frequency $9 \text{ kHz} \leq f < 10 \text{ MHz}$	Frequency $10 \text{ MHz} \leq f < 30 \text{ MHz}$
Operating	27 dB μ A/m at 9 kHz descending 10 dB/dec	-3,5 dB μ A/m
Standby	5,5 dB μ A/m at 9 kHz descending 10 dB/dec	-25 dB μ A/m
NOTE: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.		

The power of any radiated spurious emission between 30 MHz and 1 GHz shall not exceed the values given in Table 5.

Table 5

State (see note)	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW
NOTE: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.		

8.3 EUT Operation Condition

The EUT was programmed to be in continuously transmitting mode.

8.4 Test Procedure

Substitution method was performed to determine the actual spurious emission levels of the EUT.

The following test procedure as below:

1) 9 kHz to 30MHz test procedure:

1. The field strength was measured for frequencies below 30 MHz. The equipment under test was measured at a distance of 10 m on a semi-anechoic. The test antenna was a calibrated shielded magnetic field antenna.
2. The equipment under test was switched on with normal modulation. The characteristics of the modulation signal used was stated on the test report. The measuring receiver was tuned over the frequency range 9 kHz to 30 MHz, except for the frequency band on which the transmitter was intended to operate.
3. At each frequency at which a relevant spurious signal was detected the equipment under test and the test antenna was rotated until maximum field strength was indicated on the measuring receiver. This level was noted.
4. The measurements were repeated in the standby mode.
5. For measuring equipment calibrated in dB μ V/m, the reading should be reduced by 51,5 dB to be converted to dB μ A/m.

2) 30 MHz to 1GHz test procedure:



6. On the test site as test setup graph above, the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider.
7. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the test frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver.
8. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the test frequency of the transmitter under test.
9. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
10. Repeat step 4 for test frequency with the test antenna polarized horizontally.
11. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At the lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.
12. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
13. Repeat step 7 with both antennas horizontally polarized for each test frequency.
14. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:
$$\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where:
Pg is the generator output power into the substitution antenna.



8.5 Test Setup

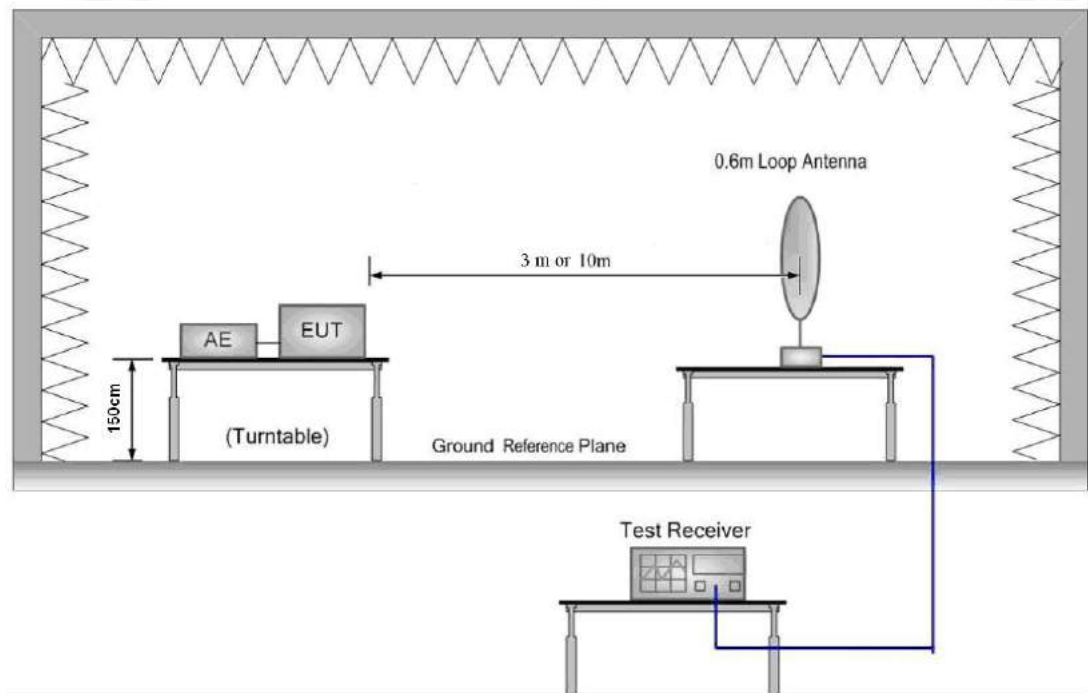


Figure: 9 kHz to 30 MHz

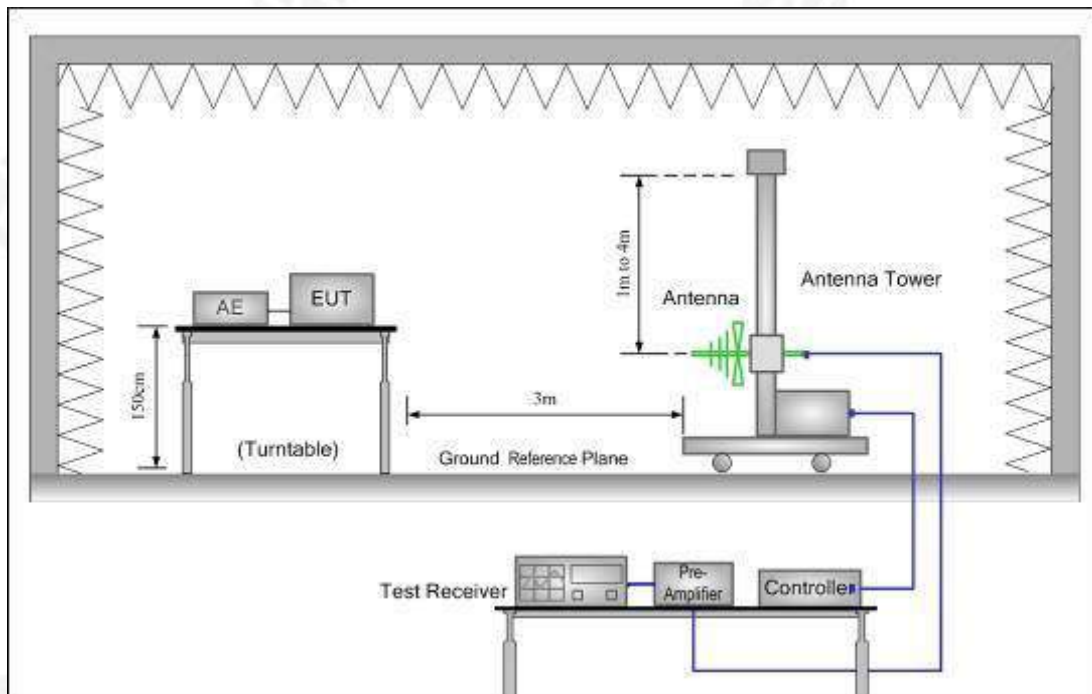


Figure: 30 MHz to 1 GHz



8.6 Test Result

Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 5V

9 kHz to 30 MHz - Tx in operation mode						
Frequency (MHz)	Polarization (H/V)	Emission Level (dBm)	Limit of Table 4 (dBm)	Margin (dB)	Detection	Result
1.062	Vertical	4.28	8.74	-4.46	Peak	Pass
3.162	V	-6.44	2.66	-9.10	Peak	Pass
6.803	V	-18.24	-1.62	-16.62	Peak	Pass
15.515	V	-24.13	-3.50	-20.63	Peak	Pass
22.622	V	-32.80	-3.50	-29.30	Peak	Pass
1.830	Horizontal	-0.07	5.96	-6.03	Peak	Pass
4.515	H	-10.84	1.36	-12.20	Peak	Pass
10.590	H	-16.87	-3.22	-13.65	Peak	Pass
14.179	H	-27.99	-3.50	-24.49	Peak	Pass
26.051	H	-33.34	-3.50	-29.84	Peak	Pass
9 kHz to 30 MHz - Tx in Standby mode						
N/A: Not applicable, since the spurious emission of the EUT is too weak to be detected.(≤ -50 dB μ A/m)						

30 MHz to 1 GHz - Tx in operation mode						
Frequency (MHz)	Polarization (H/V)	Emission Level (dBm)	Limit of Table 4 (dBm)	Margin (dB)	Detection	Result
105.385	Vertical	-72.53	-54.00	-18.53	QP	Pass
246.924	V	-67.66	-36.00	-31.66	QP	Pass
377.633	V	-65.34	-36.00	-29.34	QP	Pass
467.073	V	-78.59	-36.00	-42.59	QP	Pass
523.809	V	-63.50	-54.00	-9.50	QP	Pass
702.056	V	-65.83	-54.00	-11.83	QP	Pass
79.983	Horizontal	-68.72	-36.00	-32.72	QP	Pass
174.538	H	-73.28	-54.00	-19.28	QP	Pass
251.164	H	-53.81	-36.00	-17.81	QP	Pass
332.516	H	-56.42	-36.00	-20.42	QP	Pass
30 MHz to 1 GHz - Tx in Standby Mode						
N/A: Not applicable, since the spurious emission of the EUT is too weak to be detected.(≤ -70 dBm)						



9. Transmitter out of band (OOB) emissions

9.1 Definition

The WPT system out of band emissions are to be considered in frequency ranges defined in Figure 4 and Figure 5 (between fSL and fL and between fH and fSH).

9.2 Limit

The OOB limits are visualized in figures 4 and 5; they are descending from the intentional limits from Table 3 at fH/fL with 10 dB/decade

9.3 EUT Operation Condition

The EUT was programmed to be in continuously receiving mode.

9.4 Test Procedure

Methods of measurement (< 30 MHz)

This applies to all Product Classes.

The field strength shall be measured for frequencies below 30 MHz. The equipment under test shall be measured at a distance of 10 m on an outdoor test site. The test antenna shall be a calibrated shielded magnetic field antenna. The equipment under test and test antenna shall be arranged as stated in clause A.1.

For Product Class 3 the transmitter antenna connector of the equipment under test shall be connected to an artificial antenna (see clause 6.2) and the output connector terminated.

The equipment under test shall be switched on with normal modulation. The characteristics of the modulation signal used shall be stated on the test report. The measuring receiver shall be tuned over the frequency range 9 kHz to 30 MHz, except for the frequency band on which the transmitter is intended to operate.

At each frequency at which a relevant spurious signal is detected the equipment under test and the test antenna shall be rotated until maximum field strength is indicated on the measuring receiver. This level shall be noted.

If the transmitter can be operated in the standby mode, then the measurements shall be repeated in the standby mode.

For measuring equipment calibrated in dB μ V/m, the reading should be reduced by 51,5 dB to be converted to dB μ A/m.

Methods of measurement ($\geq$ 30 MHz)

This method applies to all Product Classes.

On an appropriate test site selected from annex A, the equipment shall be placed at the specified height on a non-conducting support and in the position closest to normal use as declared by the provider.

For Product Class 3 the transmitter antenna connector shall be connected to an artificial antenna (see clause 6.2).

The test antenna shall be oriented for vertical polarization. The output of the test antenna shall be connected to a measuring receiver.

The transmitter shall be switched on with normal modulation, and the measuring receiver shall be tuned over the frequency range 30 MHz to 2 000 MHz.

At each frequency at which a relevant spurious component is detected, the test antenna shall be raised and lowered through the specified range of heights until a maximum signal level is detected on the measuring receiver.

The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.

The maximum signal level detected by the measuring receiver shall be noted.



The substitution antenna shall be oriented for vertical polarization and calibrated for the frequency of the spurious component detected.

The frequency of the calibrated signal generator shall be set to the frequency of the spurious component detected. The input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver, if necessary.

The test antenna shall be raised and lowered through the specified range of heights to ensure that the maximum signal is received.

When a test site according to clause A.1.1 is used, there is no need to vary the height of the antenna.

The input signal to the substitution antenna shall be adjusted until an equal or a known related level to that detected from the transmitter is obtained on the measuring receiver.

Please see the 6.4 in this report.

9.5 Test Result

Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	DC 5V

Standby Mode with Modulation			
Modulation ASK			
Operation Frequency (kHz)	fc (dBμA/m)	fc-1.5KHz (dBμA/m)	fc-7.5KHz (dBμA/m)
113.50	36.95	11.48	8.87
	fc (dBμA/m)	fc+1.5KHz (dBμA/m)	fc+7.5KHz (dBμA/m)
	35.97	9.43	8.12
limit (dBμA/m)	42	27	27
Result	PASS	PASS	PASS

Standby Mode with Modulation			
Modulation ASK			
Operation Frequency (kHz)	fc (dBμA/m)	fc-1.5KHz (dBμA/m)	fc-7.5KHz (dBμA/m)
113.50	/	/	/
	fc (dBμA/m)	fc+1.5KHz (dBμA/m)	fc+7.5KHz (dBμA/m)
	/	/	/
limit (dBμA/m)	42	5.5	5.5
Result	PASS	PASS	PASS
Note: Not applicable, for the ERP level of the EUT was too weak to be detected.			



10. WPT system unwanted conducted emissions

10.1 Definition

WPT system unwanted conducted emissions are based on the emissions of the unwanted common mode current on the cable between the off board power supply and the primary coil seen as a monopole radiator driven against the power supply.

10.2 Limit

The common mode current (ICM) between 1 MHz and 30 MHz shall not exceed the following limit:
$$ICM = 47 - 8 \times \log(f) \text{ dB}\mu\text{A}$$

NOTE: f is the frequency in MHz

10.3 Test Procedure

Please see the 6.4 in this report.

10.4 Test Result

N/A

Note: This test is not applicable



11. Receiver blocking(Receiver Conformance requirements)

11.1 Definition

Blocking is a measure of the capability of the receiver to receive a wanted signal without exceeding a given degradation due to the presence of an unwanted input signal at any frequencies other than those of the receiver spurious responses.

The test shall be performed in the relevant operational modes (see clause 4.2.3).

The wanted performance criteria from clause 4.2.2 shall be used as criterion for the receiver blocking tests.

11.2 Limit

The receiver blocking limits in Table 6 shall be fulfilled.

Table 6: Receiver blocking limits

	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency (f_c) of the WPT system (see clause 4.3.3)	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \times F$ (see note)
Signal level field strength at the EUT	72 dB μ A/m	72 dB μ A/m	82 dB μ A/m
NOTE: F = OFR see clause 4.3.3.			

The EUT shall achieve the wanted performance criterion, see clause 4.2.2, in the presence of the blocking signal.

11.3 Test Procedure

Please see the 6.4 in this report.


11.4 Test Result

Operational Mode			
Operation frequency (kHz)	In-band signal (dB μ A/m)	OOB signal (dB μ A/m)	Remote-band signal (dB μ A/m)
113.50	72	/	/
/	/	72	/
/	/	72	/
/	/	/	82
/	/	/	82
Limit	Input the interference signal can work normally		
Result	PASS	PASS	PASS




12. Test Setup Photo

9 kHz to 30 MHz - Tx in operation mode

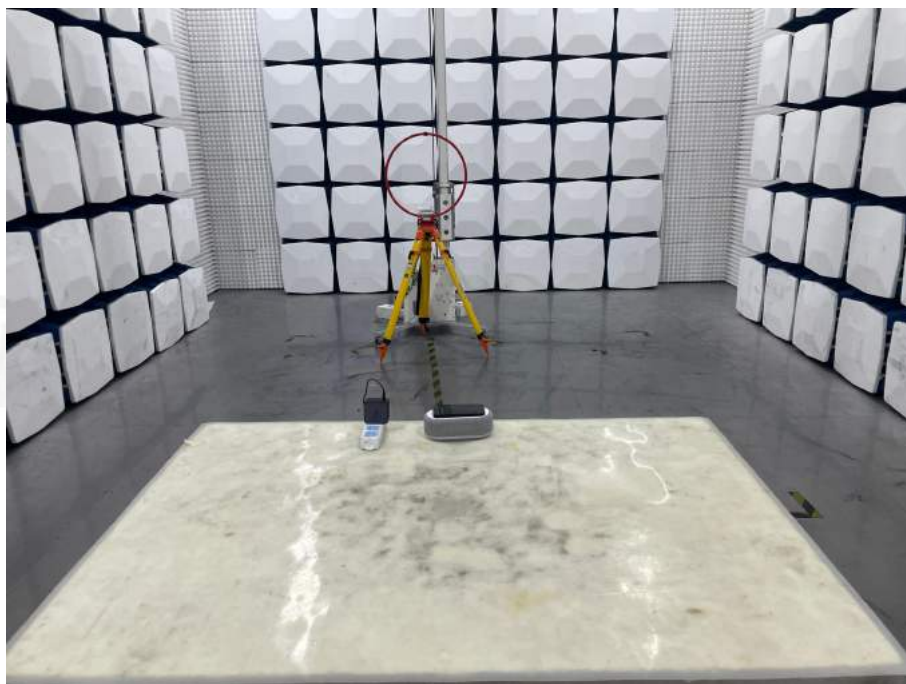

30 MHz to 1 GHz - Tx in operation mode

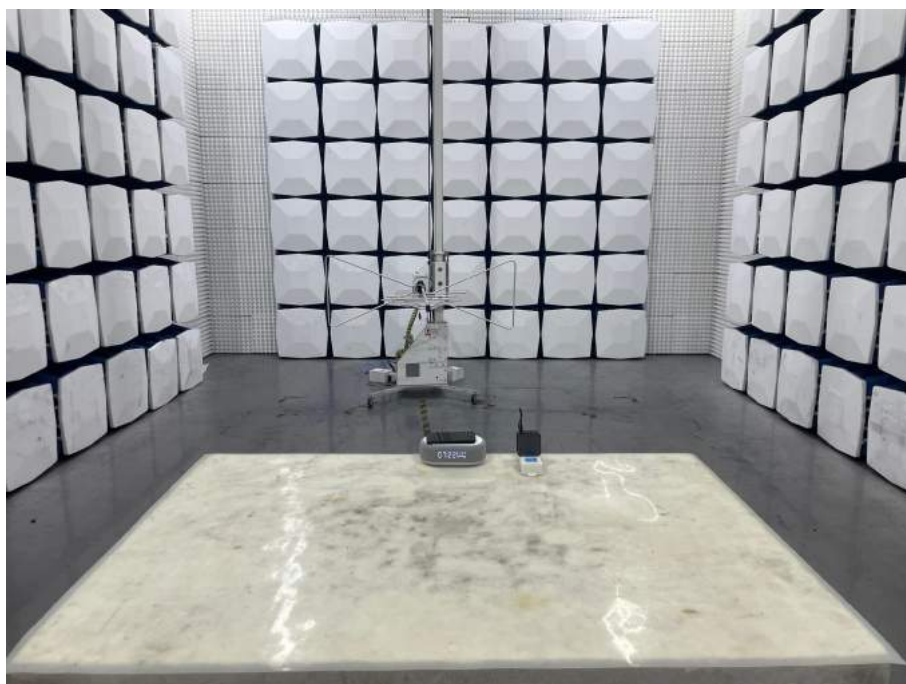




13. Photos of the EUT

EUT Photo 1



EUT Photo 2

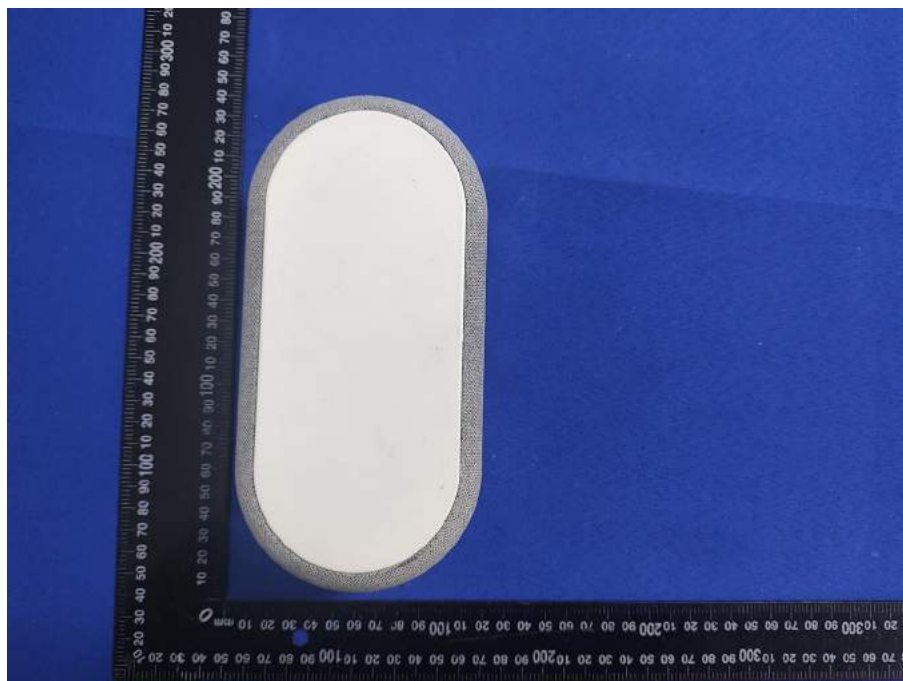



EUT Photo 3



EUT Photo 4





EUT Photo 5




EUT Photo 6






EUT Photo 7

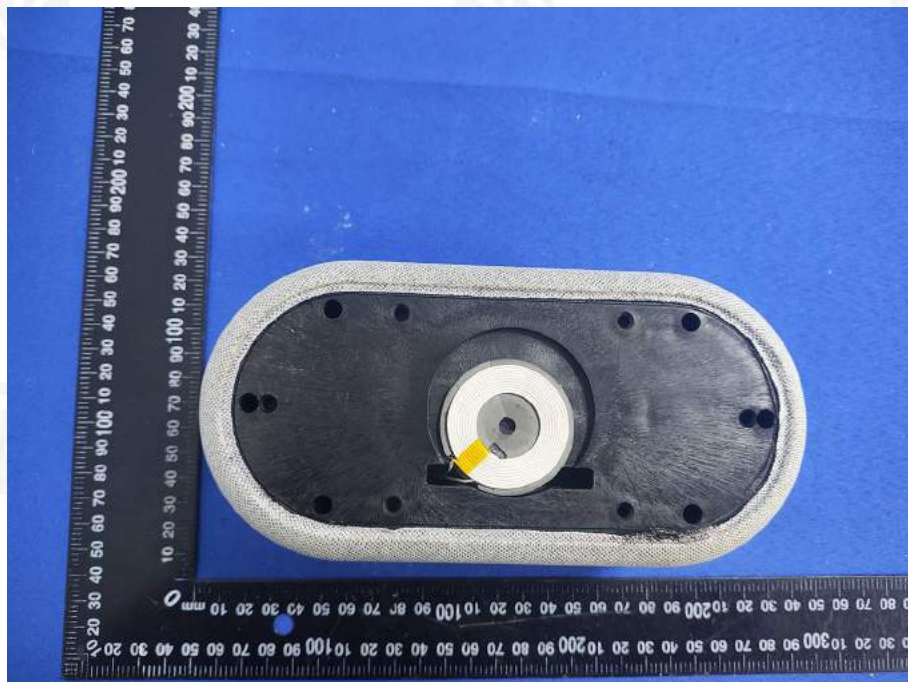


EUT Photo 8

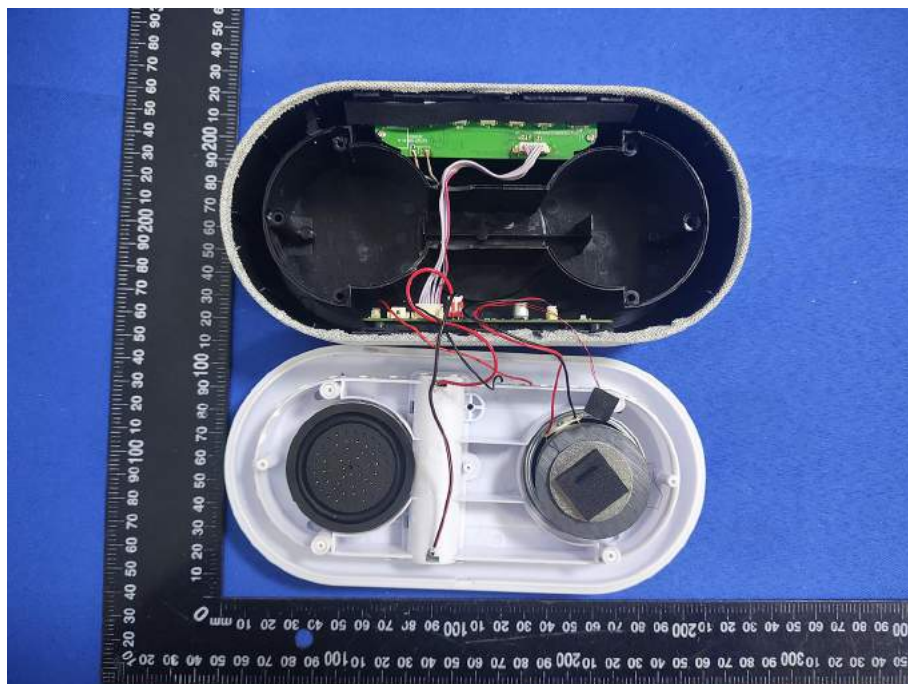




EUT Photo 9

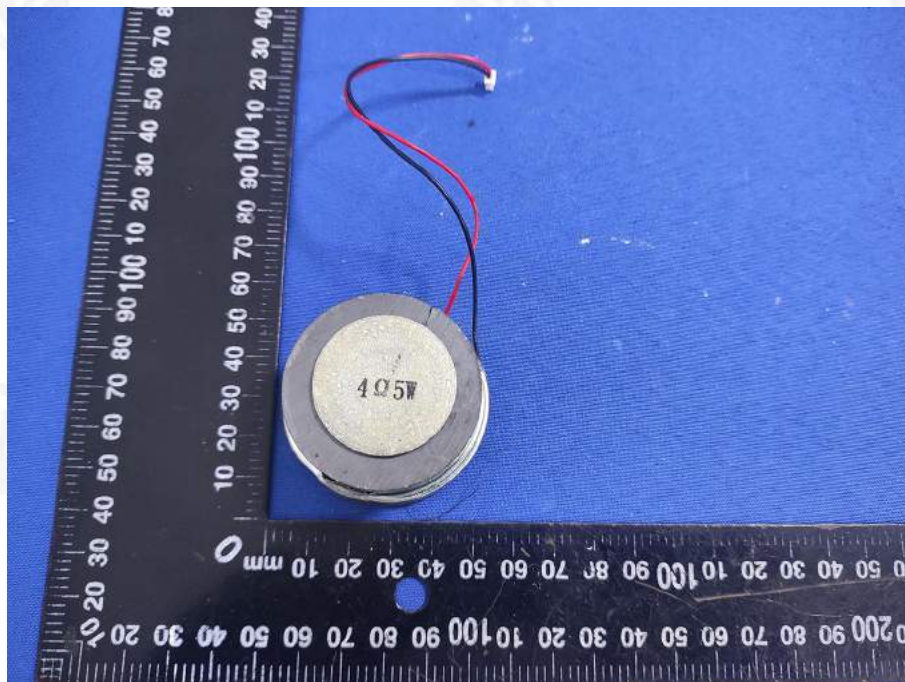


EUT Photo 10

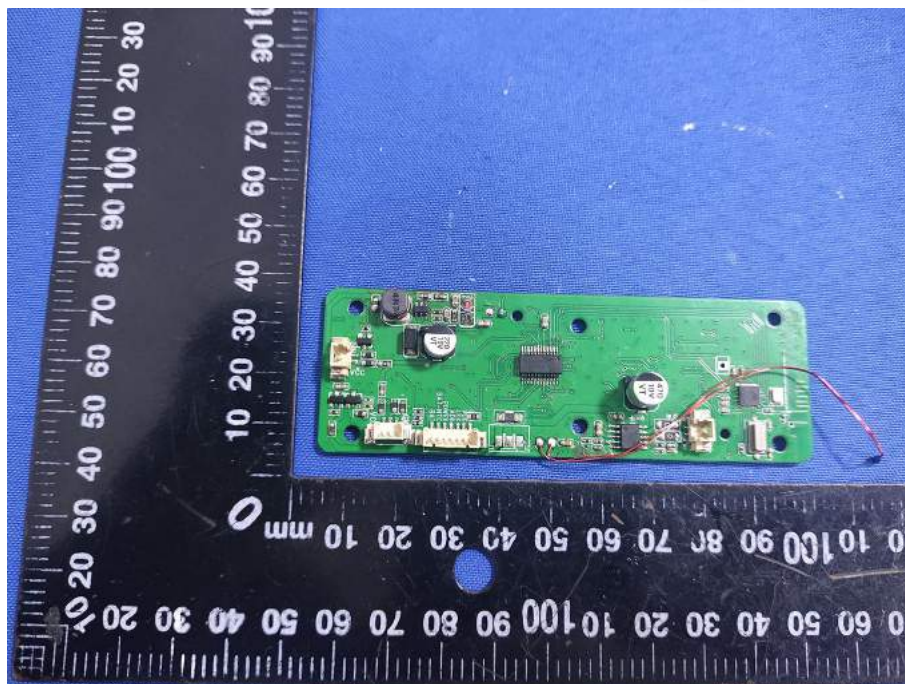




EUT Photo 11

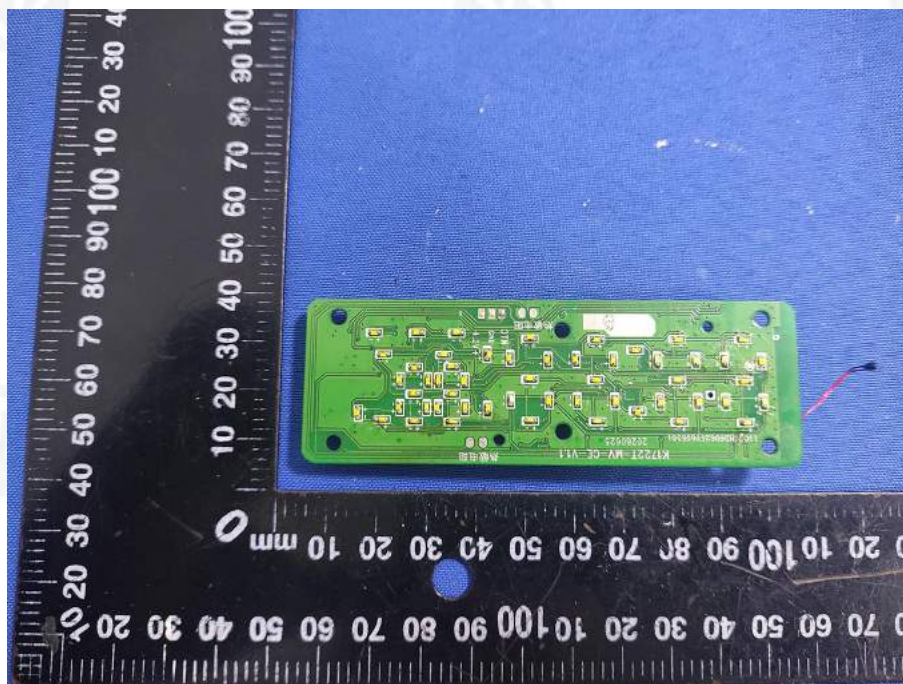


EUT Photo 12

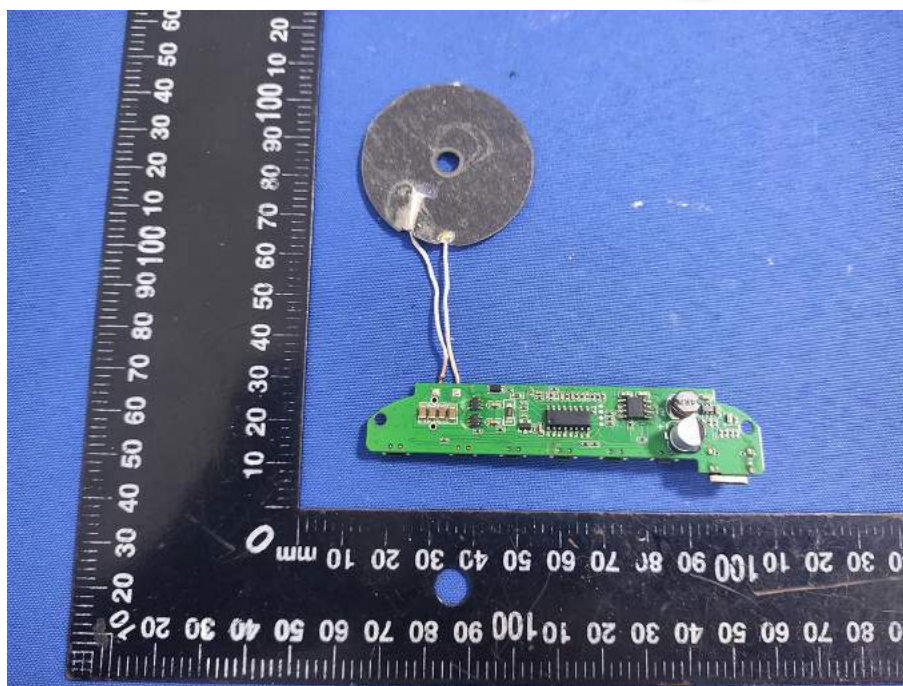



EUT Photo 13

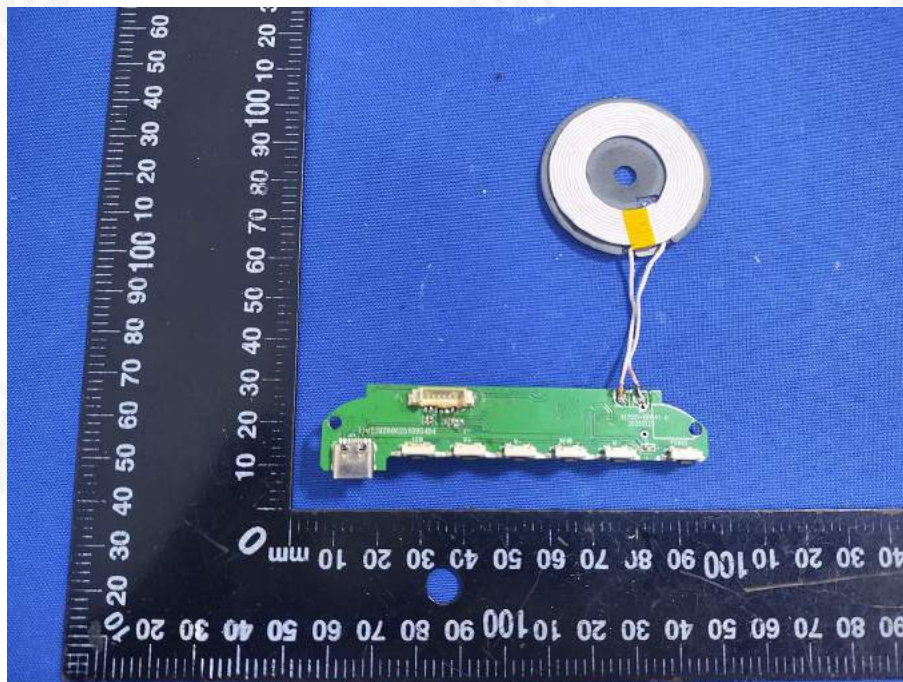

***** END OF REPORT *****



EMF REPORT

Report Number.....: ZKT-2608251577E-1

Date of Test.....: Aug. 25, 2026 to Sep. 01, 2026

Date of issue.....: Sep. 01, 2026

Total number of pages.....: 7

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Mid Ocean Brands B.V.

Address: Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.

Manufacturer's name: 117486

Address: N/A

Test specification:

Standard.....: EN IEC 62311:2020
EN 50665:2017

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-138_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.1(a) requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Wireless Speaker

Trademark: N/A

Model/Type reference.....: MO2378

Ratings.....: Input: 5V --- 3A, 9V --- 3A
Output: DC5V---1A, 7.5V---1A, 9V---1.1A, 12V---1.25A
Battery: 3.7V, 1200mAh, 4.44Wh



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

**Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

Page

1. Version	4
2. GENERAL INFORMATION	5
3. Maximum Permissible Exposure	6
3.1 Applicable Standard	6
3.2 Limit	6
3.3 Test Method	7
3.4 Calculated Result and Limit	7



1. Version

Report No.	Issue Date	Description	Approved
ZKT-2608251577E-1	Sep. 01, 2026	Original	Valid



2. GENERAL INFORMATION

Product Name:	Wireless Speaker	
Trade Mark:	N/A	
Model No.:	MO2378	
Serial No.:	N/A	
Model Differences:	N/A	
Hardware Version:	V1.0	
Software Version:	V1.0	
Operation Frequency:	2402 ~ 2480MHz for BDR/EDR 110kHz ~ 205kHz for WPT	
Antenna Type:	PCB Antenna for BDR/EDR Loop Coil Antenna for WPT	
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK for BDR/EDR ASK for WPT	
Antenna Gain:	Band	Gain
	2.402 - 2.48 GHz	0dBi
	110 - 205kHz	0dBi
	Note the antenna gain is provided by the customer, and the final test result has nothing to do with us.	
Power Supply:	Input: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A Output: DC5V $\overline{=}$ 1A, 7.5V $\overline{=}$ 1A, 9V $\overline{=}$ 1.1A, 12V $\overline{=}$ 1.25A	
Battery Capacity:	3.7V, 1200mAh, 4.44Wh (Only supports playing music)	



3. Maximum Permissible Exposure

3.1 Applicable Standard

EN IEC 62311 2020 Generic standard to demonstrate the compliance of electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (0 Hz–300 GHz) is to demonstrate the compliance of apparatus with the basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields as well as induced and contact current.

3.2 Limit

Reference levels for electric, magnetic and electromagnetic fields
(0 Hz to 300 GHz, unperturbed rms values)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μT)	Equivalent plane wave power density S_{eq} (W/m ²)
0-1 Hz	—	$3,2 \times 10^4$	4×10^4	—
1-8 Hz	10 000	$3,2 \times 10^4/f^2$	$4 \times 10^4/f^2$	—
8-25 Hz	10 000	$4\,000/f$	$5\,000/f$	—
0,025-0,8 kHz	$250/f$	$4/f$	$5/f$	—
0,8-3 kHz	$250/f$	5	6,25	—
3-150 kHz	87	5	6,25	—
0,15-1 MHz	87	$0,73/f$	$0,92/f$	—
1-10 MHz	$87/f^{1/2}$	$0,73/f$	$0,92/f$	—
10-400 MHz	28	0,073	0,092	2
400-2 000 MHz	$1,375\ f^{1/2}$	$0,0037\ f^{1/2}$	$0,0046\ f^{1/2}$	$f/200$
2-300 GHz	61	0,16	0,20	10

Notes:

1. f as indicated in the frequency range column.
2. For frequencies between 100 kHz and 10 GHz, S_{eq} , E^2 , H^2 , and B^2 are to be averaged over any six-minute period.
3. For frequencies exceeding 10 GHz, S_{eq} , E^2 , H^2 , and B^2 are to be averaged over any $68/f^{1.05}$ -minute period (f in GHz).
4. No E-field value is provided for frequencies < 1 Hz, which are effectively static electric fields. For most people the annoying perception of surface electric charges will not occur at field strengths less than 25 kV/m. Spark discharges causing stress or annoyance should be avoided.



3.3 Test Method

$$E (V/m) = (30 \cdot P \cdot G)^{0.5} / d$$

E = Electric Field (V/m)

P = Peak RF output Power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

3.4 Calculated Result and Limit

BT						
Mode	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Electric Field (V/m)	Limit of Electric Field (V/m)	Result
GFSK	Hopping	2.34	0.0017	1.13	61	Pass

WPT						
Mode	Frequency (kHz)	H-field(3m) (dBμA/m)	H-field(3m) (uA/m)	H-field(3m) (A/m)	Limit (A/m)	Result Pass/Fail
ASK	113.50	50.93	351.96	0.000352	5	Pass

Note: dBuA/m to uA, $\mu A = 10^{(dBuA/20)}$

***** END OF REPORT *****